

# construction joints

SpecSeal<sup>®</sup>  
**SIL**

## Silicone Sealant

**SpecSeal<sup>®</sup> SIL300 Silicone Sealant** is a high performance silicone firestop sealant tested to resist the passage of smoke, flame and water through construction joints and through-penetrations. SIL300 Sealant cures to form a flexible seal and carries a Class 1 W Rating for water resistance (Per ANSI/UL1479).

- Available in a Gun Grade or Self Leveling
- Ozone and UV Resistant
- Excellent recovery from joint extension and compression
- Listed in over 175 UL<sup>®</sup> Tested Systems



### ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.
SIL300	730573013106	10.1 oz Tube (300 ml) 18.2 cu. in.	1	24
SIL305	730573013052	4.5 Gal. Pail (17.0 liters) 1,037 cu. in.	1	1
SIL320	730573013205	20 oz. Sausage Tube (592 ml) 36 cu. in.	1	12
SIL305SL	730573013267	Self-leveling 4.5 Gal. Pail (17.0 liters) 1,037 cu. in.	1	1
SIL320SL	730573013229	Self-leveling 20 oz. Sausage Tube (592 ml) 36 cu. in.	1	12

**TEST STANDARDS:** ASTM E1966 (UL2079), CAN/ULC-S115

Limestone & Gray Color

Permanent Solution

ACOUSTICAL STC 61 (Relates to specific construction)

MOVEMENT +35% Maximum Movement Capability

UL CERTIFIED

FM APPROVED

FBC SYSTEM COMPATIBLE


Intertek

SpeedFlex<sup>®</sup>  
**TTG**

## SpeedFlex<sup>®</sup> TTG Track Top Gasket

**SpeedFlex<sup>®</sup> TTG Track Top Gasket** makes short work of construction joints in gypsum board construction. TTG eliminates the need for firestop sealants or sprays by firestopping as the wall is constructed. Track Top Gasket is easily cut to length with scissors or a sharp knife, installing quick with no waste.

- Works with any ceiling track
- Tested for both standard and shaft wall construction
- Allows for 100% compression and extension
- Red in color for easy identification and inspection

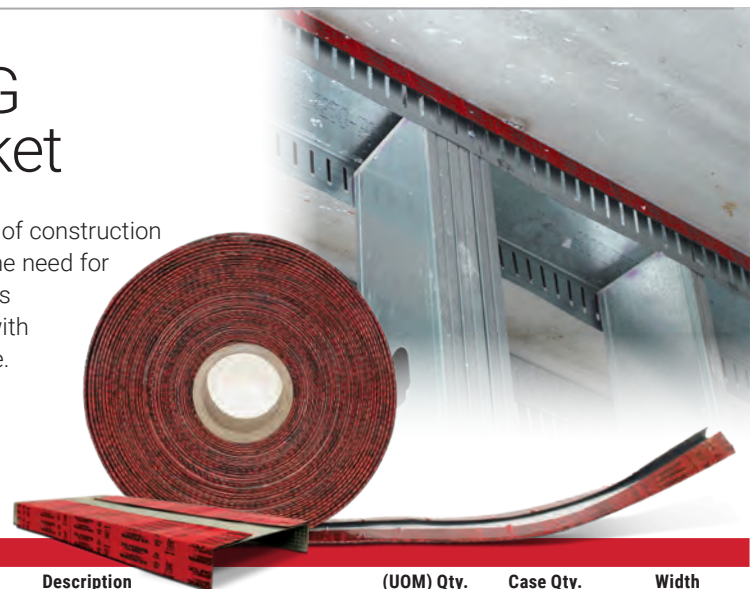

### ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Width
TTG250J	730573082508	TTG for 2.5" (63.5 mm) J-Runners - 150 foot (45.7 meter) roll	1	1	6.25" (159 mm)
TTG350F	730573083550	TTG with folded legs for 3-1/2" (89 mm) or 3-5/8" (92mm) ceiling track - 2x 80.5 foot (24.5 meter) rolls	1	1	6.25" (159 mm)
TTG400J	730573084007	TTG for 4" (102 mm) J-Runners - 150 foot (45.7 meter) roll	1	1	7.50" (191 mm)
TTG600F	730573086049	TTG with folded legs for 6" (152 mm) ceiling track - 2x 80.5 foot (24.5 meter) rolls	1	1	8.63" (219 mm)
TTG600J	730573086025	TTG for 6" (152 mm) J-Runners - 150 foot (45.7 meter) roll	1	1	9.7" (248 mm)

**TEST STANDARDS:** ASTM E1966 (UL 2079), CAN/ULC S115, ASTM E90

Red Color

Permanent Solution

ACOUSTICAL STC 56 (Relates to specific construction)

MOVEMENT +100% Maximum Movement Capability

UL CERTIFIED