

The listed systems are typical applications only. Please refer to the volume of your 3M specification guide for your specific application or use the 3M System Selector available at 3M.com/firestop

3M™ Fire Protection Products

3M™ Fire Barrier Sealant CP 25WB+

3M™ Fire Barrier Sealant CP 25WB+ is a high-performance, intumescent latex-based sealant offering outstanding fire performance plus a non-halogen formula. Approved for the majority of caulk through penetration systems.

- Firestop tested up to 4 hours in accordance with ASTM E 814 (UL 1479)
- Acoustic barrier: STC-Rating of 54 when tested in a STC 54-rated wall assembly
- Provides L-Rating (smoke seal)
- Water based: easy cleanup and routine disposal with no special handling
- Intumescent: expands when heated to seal around items consumed by fire
- Re-enterable/repairable
- Halogen-free and no-sag formulation
- Over 600 tested and listed systems
- One-part system: no mixing or measuring required
- Fast-drying: tack-free in approximately 10–15 minutes
- Paintable (best results obtained after 72 hour cure)
- Red color widely recognized as a firestop for inspections
- High caulk rate: 1000g/min. with 1/4 in. nozzle opening
- Documented aging properties

Not for use with CPVC pipe.



FIRE BARRIER



SMOKE SEAL



SOUND BARRIER



3M™ Fire Barrier Sealant FD 150+

3M™ Fire Barrier Sealant FD 150+ is the economical alternative to costly firestopping applications. Used to firestop metal pipes or cables through concrete or gypsum, and in dynamic head-of-wall systems.

- Firestop tested up to 3 hours in accordance with ASTM E 814 (UL 1479)
- Fire Resistive Joint System tested up to 4 hours in accordance with ASTM E 1966 (UL 2079)
- Water based acrylic latex: easy cleanup and routine disposal
- Safe, solvent-free: fully cured, continuous seal with ±19% dynamic joint movement capability
- Single-part formulation
- Remains pliable allowing for normal pipe movement
- Fast-drying: tack-free in approximately 30–60 minutes
- Paintable (best results obtained after 72 hour cure)
- Excellent adhesion: multi-viscosity grade offers excellent caulking properties
- Available in limestone gray, blue and red

Not for use with CPVC pipe.




FIRE BARRIER



SMOKE SEAL



SOUND BARRIER



ELASTOMERIC



Construction Joint Firestop Solutions

Construction Joint Spray & Sealants

3M™ FireDam™ Spray 200

3M™ FireDam™ Spray 200 is a flexible, sprayable, water-based coating that dries in ambient conditions to form a flexible seal. 3M™ FireDam™ Spray 200 has an extensive portfolio of tested and listed systems for protecting construction joints, and perimeter joints (curtain wall joints). In addition this product is used to firestop through penetrations with up to 2-hour rated systems.

- Up to 4-hour fire protection in construction joints per ASTM E 1966 (UL 2079)
- Up to 2-hour fire protection for through penetration systems per ASTM E 814 (UL 1479)
- Highly elastic material maintains performance with up to ±50% movement capabilities
- High-cling properties help prevent sagging
- Water-based: dries when exposed to the atmosphere, easy water clean-up
- Robust job site formula: freeze/thaw resistant, uniform seal formation in heat and cold conditions
- Available in gray and red: applied with conventional airless spray equipment
- Fast drying: paintable when cured




FIRE BARRIER	SMOKE SEAL	ELASTOMERIC	SOUND BARRIER
UP TO 4 HOUR Fire Protection	L RATED Meets Optional L Requirements	±50% Movement Capability	STC 56 In STC 56-rated wall assembly



3M™ Fire Barrier Sealant FD 150+

3M™ Fire Barrier Sealant FD 150+ is the economical alternative to costly firestopping applications. Used to firestop metal pipes or cables through concrete or gypsum, and in dynamic head-of-wall systems.

- Firestop tested up to 3 hours in accordance with ASTM E 814 (UL 1479)
- Fire Resistive Joint System tested up to 4 hours in accordance with ASTM E 1966 (UL 2079)
- Water based acrylic latex: easy cleanup and routine disposal
- Safe, solvent-free: fully cured, continuous seal with ±19% dynamic joint movement capability
- Single-part formulation
- Remains pliable allowing for normal pipe movement
- Fast-drying: tack-free in approximately 30–60 minutes
- Paintable (best results obtained after 72 hour cure)
- Excellent adhesion: multi-viscosity grade offers excellent caulking properties
- Available in limestone gray, blue and red

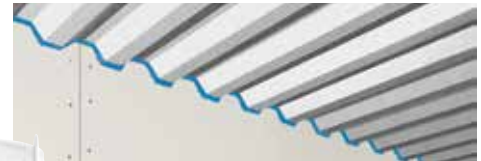



FIRE BARRIER	SMOKE SEAL	SOUND BARRIER	ELASTOMERIC
UP TO 4 HOUR Fire Protection	L RATED Meets Optional L Requirements	STC 56 In STC 56-Rated Wall Assembly	±19% Movement Capability









































Not for use with CPVC pipe.

Ordering Information















3M™ Fire Barrier Rated Foam FIP 1-Step

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
FIP 1-Step	Firestop Foam Up to 2-hr Penetration Firestop	12.85 oz.		 Cartridge	0-00-51115-54925-0	1/Cs	Each
Mixing Nozzles	Mixing Nozzles	—	—	Nozzle	0-00-51115-54933-0	5/Cs	Bag
Albion® Manual Dispenser Gun	Manual gun for 3M™ Fire Rated Foam FIP 1-Step	—	—	Gun	0-00-76308-14612-2	1/Cs	Each
Albion® Power Dispenser Gun	Power gun for 3M™ Fire Rated Foam FIP 1-Step	—	—	Gun	0-00-76308-14610-8	1/Cs	Each
	18V Li-ion Battery	—	—	Battery	0-00-76308-14614-6	1/Cs	Each

3M™ Fire Barrier Sealants

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
CP 25WB+	Up to 4-hr Penetration Firestop	10.1 oz.		 Tube	0-00-51115-11638-4	12/Cs	Each
	Up to 4-hr Penetration Firestop	20 oz.		 Sausage	0-00-51115-11642-1	10/Cs	Each
	Up to 4-hr Penetration Firestop	27 oz.		 Cartridge	0-00-51115-11641-4	6/Cs	Each
	Up to 4-hr Penetration Firestop	2 gal.		 Pail	0-00-51115-11639-1	1/Cs	Each
	Up to 4-hr Penetration Firestop	5 gal.		 Pail	0-00-51115-11640-7	1/Cs	Each
IC 15WB+	Up to 3-hr Penetration Firestop	10.1 oz.		 Tube	0-00-51115-16557-3	12/Cs	Each
	Up to 3-hr Penetration Firestop	20 oz.		 Sausage	0-00-51115-16560-3	10/Cs	Each
	Up to 3-hr Penetration Firestop	4.5 gal.		 Pail	0-00-51115-16558-0	1/Cs	Each
FD 150+	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.		 Tube	0-00-51115-11574-5	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.		 Sausage	0-00-51115-11634-6	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.		 Cartridge	0-00-51115-11602-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.		 Pail	5-00-51115-11575-7	1/Cs	Each
FD 150+	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.		 Tube	0-00-51115-18812-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.		 Sausage	0-00-51115-18810-7	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.		 Cartridge	0-00-51115-18811-4	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.		 Pail	0-00-51115-18813-8	1/Cs	Each
FD 150+	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.		 Tube	0-00-51115-16564-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.		 Sausage	0-00-51115-16567-2	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.		 Cartridge	0-00-51115-16566-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.		 Pail	0-00-51115-16565-8	1/Cs	Each

3M™ Fire Barrier Water Tight Sealants and Spray (W-Rated)

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
3000 WT 	Intumescent Silicone (Up to 4-hr Penetration Firestop)	10.1 oz.		 Tube	0-00-51115-16593-1	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	20 oz.		 Sausage	0-00-51115-18788-9	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	4.5 gal.		 Pail	5-00-51115-16594-3	1/Cs	Each
1000 NS 	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	10.1 oz.		 Tube	0-00-51115-11535-6	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	20 oz.		 Sausage	0-00-51115-18790-2	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	4.5 gal.		 Pail	5-00-51115-11537-5	1/Cs	Each