



AIR-SHIELD ALUMINUM FLASHING

AIR-SHIELD ALUMINUM FLASHING provides protection against water infiltration in critical detail areas, such as window and door openings, deck-to-wall intersections, corner boards, wall-to-wall tie-ins, foundation sill plates, sheathing panel seams, under stucco finishes, masonry walls, and other non-roof detail areas. Suitable substrate types are wood, concrete, concrete masonry units (CMU), and exterior gypsum sheathing.



AIR-SHIELD THRU-WALL FLASHING

AIR-SHIELD THRU-WALL FLASHING is a self-adhering, flexible membrane flashing. It is a roll-type product that is nominally 40 mils thick. This material is an air, vapor, and liquid moisture barrier.



AIR-SHIELD BUTYL FLASHING

AIR-SHIELD BUTYL FLASHING is a primerless, composite membrane that is comprised of a black woven polyethylene facer and easy-to-release kraft paper release liner. The product is designed for extreme cold applications down to 10° F (-12° C). It can be used as a flashing for rough openings, windows, detailing, and as a transition membrane. This material is an air, vapor, and liquid moisture barrier.

The product is designed for extreme cold applications down to 10° F (-12° C). It can be used as a flashing for rough openings, windows, detailing, and as a transition membrane. This material is an air, vapor, and liquid moisture barrier.



POINTING MASTIC

POINTING MASTIC is a pre-mixed, cold-applied, polymeric, single-component sealing compound. POINTING MASTIC was specifically designed to seal all exterior, vertical, and horizontal terminations. POINTING MASTIC can be used on all patches and overlaps in detail areas. Once applied, it provides excellent adhesive and bonding strengths. POINTING MASTIC cures to form a tough, flexible membrane.

BEM


BEM is a one-component, cold-applied, non-slump waterproofing material that can be used for a variety of applications with building envelope products from W. R. MEADOWS. BEM cures to form a tough, flexible waterproofing membrane. BEM is a high quality moisture curing elastomeric waterproofing and sealing material.



AIR-SHIELD 25 MIL FLASHING TAPE

AIR-SHIELD 25 MIL FLASHING TAPE is a self-adhering, flexible membrane flashing. It is a roll-type product that is nominally 25 mils thick. This material is an air, vapor, and liquid moisture barrier. When properly applied, the product reduces the risk of rot and mold development.

When properly applied, the product reduces the risk of rot and mold development.

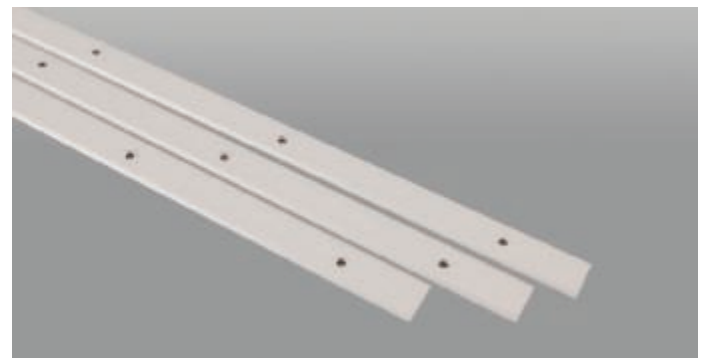

TERMINATION BAR

TERMINATION BAR is a multi-purpose, preformed, professional way to attach a wide variety of construction waterproofing, drainage boards, and flashing systems.