



Depth adjuster

Get optimal pin performance by adjusting the setting based on type of base material.



Auto Shut Off/On

Won't drain the Li-Ion battery when not in use

Fuel cell included in every box of fasteners

Never have to stall a job

Fuel and battery gauges

No interruptions in your day because you always know where your tool stands

**Improved Stick Rate
Better Reliability**
Operating Temperature: 5°F to 122°F
Light-weight: Only 7.6 lbs
Battery Capacity: 3,500 shots




Integrated Cap

Closed cap creates thermal break
99.5% thermally efficient when cap is closed

Washer Diam. 2-3/8"

Large bearing surface keeps insulation from sagging

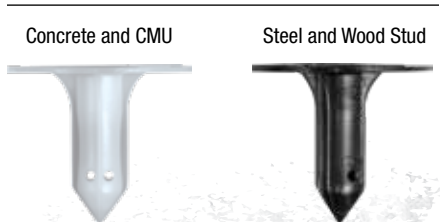


Concrete and CMU

Steel and Wood Stud

FASTENER SELECTION CHART

INSULATION THICKNESS	CONCRETE OR BLOCK PART NO.	STEEL OR WOOD PART NO.	BOX QTY
1"	T4IFC-100	T4IFS-100	500
1-1/2"	T4IFC-112	T4IFS-112	500
2"	T4IFC-200	T4IFS-200	500
2-1/2"	T4IFC-212	T4IFS-212	500
3"	T4IFC-300	T4IFS-300	500
3-1/2"	T4IFC-312	T4IFS-312	500
4"	T4IFC-400	T4IFS-400	500
5"	T4IFC-500	T4IFS-500	500
6"	T4IFC-600	T4IFS-600	400
Tool	T4IF	T4IF	1

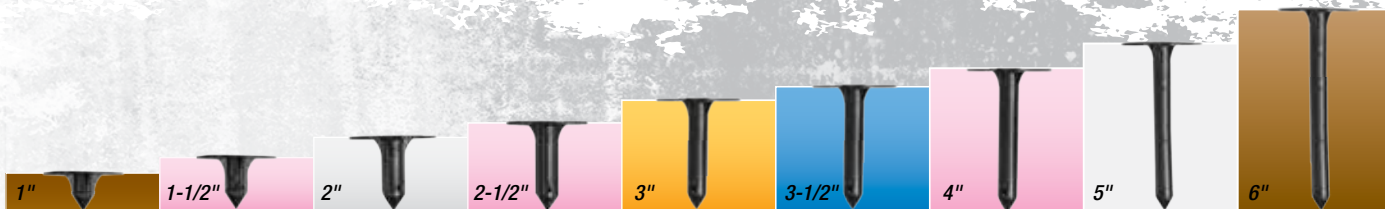

STEEL OR WOOD