


# 3M™ Fire Protection Products

## Typical Applications — Commercial Construction

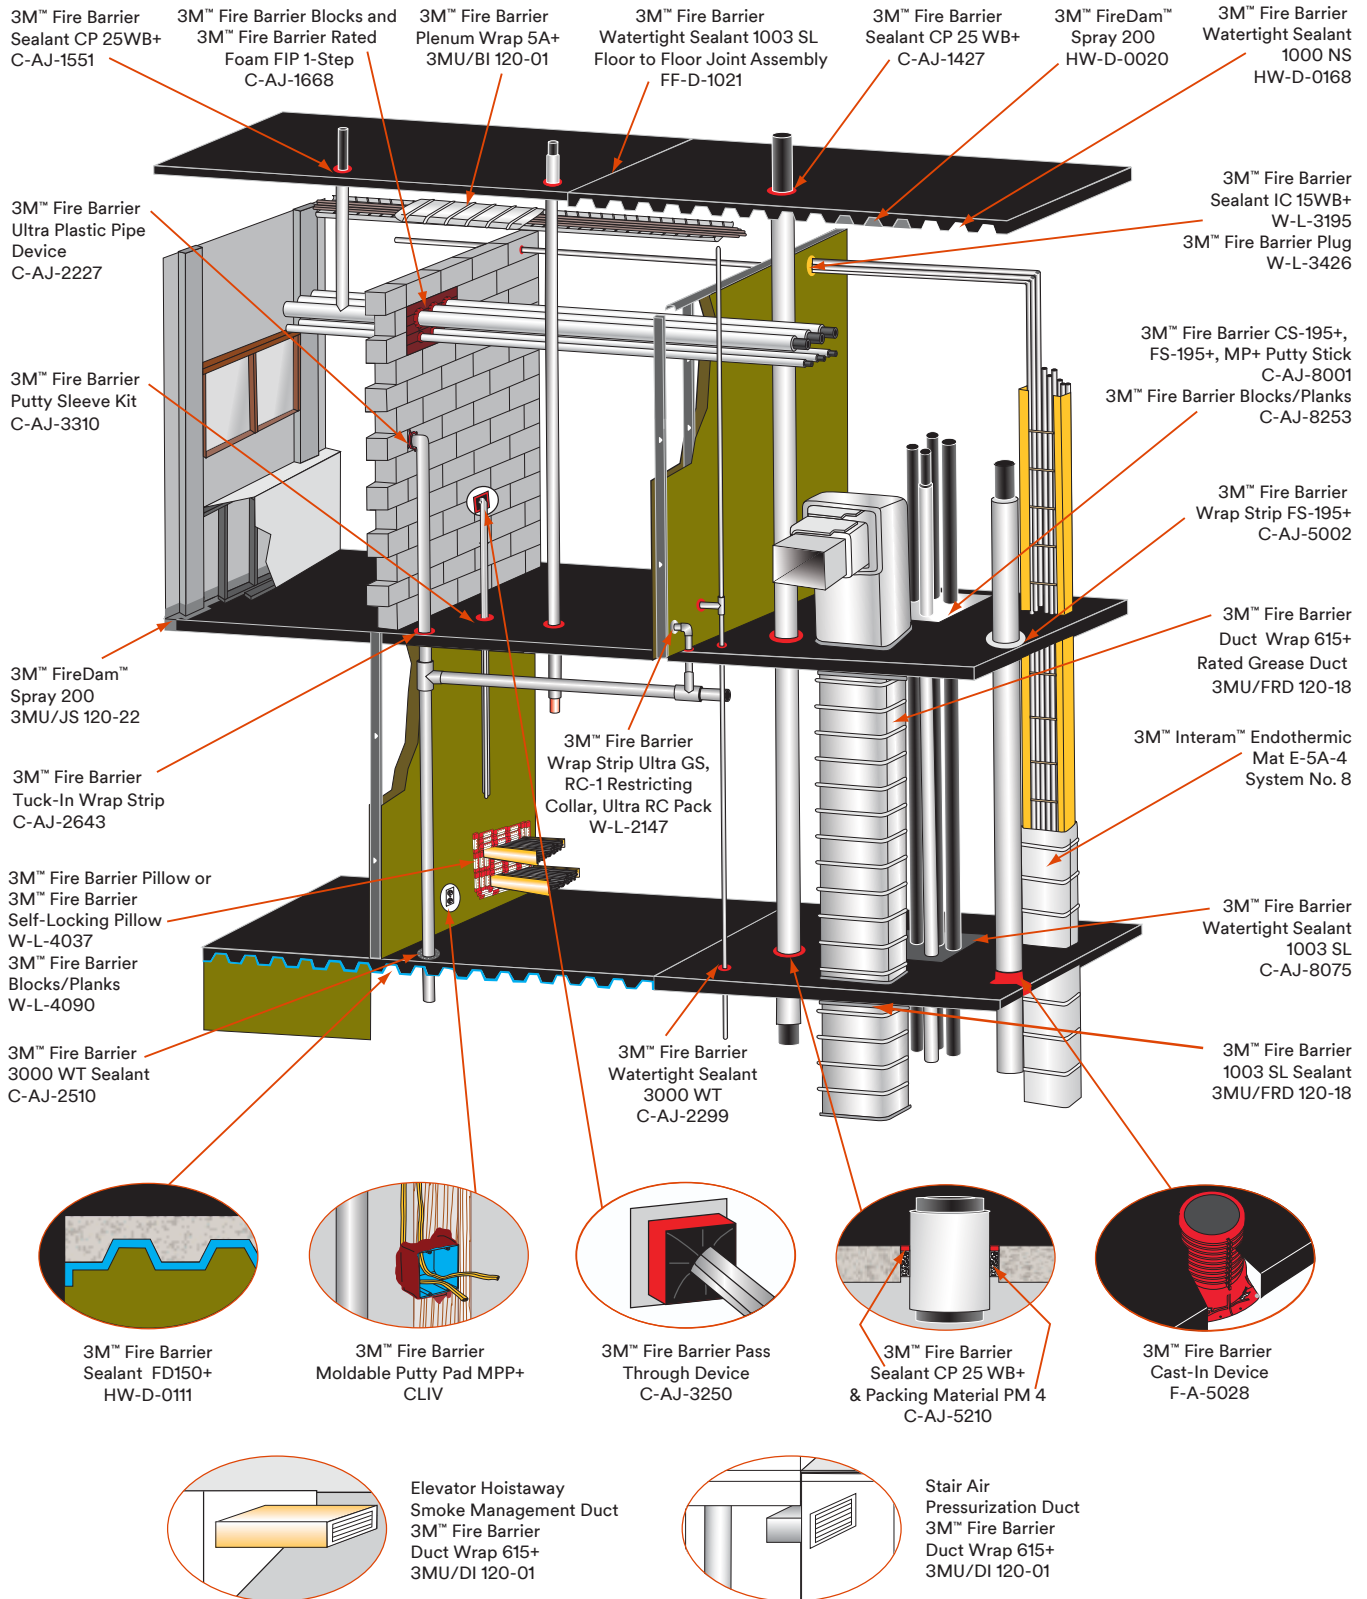

The listed systems are typical applications only. Please refer to the volume of your 3M specification guide for your specific application or use the 3M System Selector available at [3M.com/firestop](http://3M.com/firestop)

## Fire Barrier Rated Foam

### 3M™ Fire Barrier Rated Foam FIP 1-Step

Designed to expand up to 5 times in volume after dispensing, 3M™ Fire Barrier Rated Foam FIP 1-Step is a two-part urethane, smoke, sound and firestopping foam. This intumescent foam can be used to fill the annular space created by pipes and cables penetrating through fire-rated construction. It's an alternative to mineral wool, bricks, pillows and runny, ineffective foams and is UL listed.

- Firestop tested and rated up to 2 hours in accordance with ASTM E 814 (UL 1479) and CAN/ULC S115
- Sag resistant, quick curing formulation that expands up to 5 times in volume during installation
- Intumescent foam expands when exposed to fire
- Re-enterable and repairable foam remains pliable after installation
- Excellent adhesion and does not require backing material in wall or floor applications
- Paintable with primer





FIRE BARRIER



SMOKE SEAL



SOUND BARRIER



## Water Based Firestop Sealants

### 3M™ Fire Barrier Sealant CP 25WB+

3M™ Fire Barrier Sealant CP 25WB+ is a high-performance, intumescent latex-based sealant offering outstanding fire performance plus a non-halogen formula. Approved for the majority of caulk through penetration systems.

- Firestop tested up to 4 hours in accordance with ASTM E 814 (UL 1479)
- Acoustic barrier: STC-Rating of 54 when tested in a STC 54-rated wall assembly
- Provides L-Rating (smoke seal)
- Water based: easy cleanup and routine disposal with no special handling
- Intumescent: expands when heated to seal around items consumed by fire
- Re-enterable/repairable
- Halogen-free and no-sag formulation
- Over 600 tested and listed systems
- One-part system: no mixing or measuring required
- Fast-drying: tack-free in approximately 10–15 minutes
- Paintable (best results obtained after 72 hour cure)
- Red color widely recognized as a firestop for inspections
- High caulk rate: 1000g/min. with 1/4 in. nozzle opening
- Documented aging properties

Not for use with CPVC pipe.



FIRE BARRIER



SMOKE SEAL



SOUND BARRIER



# Ordering Information

## 3M™ Fire Barrier Sealants

Unit Volumes: 10.1 fl. oz. tube (298.7 mL, 18.2 in.<sup>3</sup>), 10.3 fl. oz. tube (304.6 mL, 18.6 in.<sup>3</sup>), 20 fl. oz. sausage (591.5 mL, 36.1 in.<sup>3</sup>), 27 fl. oz. tube (798.5 mL, 48.7 in.<sup>3</sup>), 28 fl. oz. tube (828.1 cc, 50.5 in.<sup>3</sup>), 2 gal. pail (7.57 L, 462 in.<sup>3</sup>), 4.5 gal. pail (.017 m<sup>3</sup>, 1039.5 in.<sup>3</sup>), 5 gal. pail (18.9 L, 1155 in.<sup>3</sup>)

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
<b>CP 25WB+</b> 	Up to 4-hr Penetration Firestop	10.1 oz.	Red	Tube	000-51115-11638-4	12/Cs	Each
	Up to 4-hr Penetration Firestop	20 oz.	Red	Sausage	000-51115-11642-1	10/Cs	Each
	Up to 4-hr Penetration Firestop	27 oz.	Red	Cartridge	000-51115-11641-4	6/Cs	Each
	Up to 4-hr Penetration Firestop	2 gal.	Red	Pail	000-51115-11639-1	1/Cs	Each
	Up to 4-hr Penetration Firestop	5 gal.	Red	Pail	000-51115-11640-7	1/Cs	Each
<b>IC 15WB+</b> 	Up to 3-hr Penetration Firestop	10.1 oz.	Yellow	Tube	000-51115-16557-3	12/Cs	Each
	Up to 3-hr Penetration Firestop	20 oz.	Yellow	Sausage	000-51115-16560-3	10/Cs	Each
	Up to 3-hr Penetration Firestop	4.5 gal.	Yellow	Pail	000-51115-16558-0	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Blue	Tube	000-51115-11574-5	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Blue	Sausage	000-51115-11634-6	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Blue	Cartridge	000-51115-11602-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Blue	Pail	500-51115-11575-7	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Red	Tube	000-51115-18812-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Red	Sausage	000-51115-18810-7	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Red	Cartridge	000-51115-18811-4	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Red	Pail	000-51115-18813-8	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Grey	Tube	000-51115-16564-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Grey	Sausage	000-51115-16567-2	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Grey	Cartridge	000-51115-16566-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Grey	Pail	000-51115-16565-8	1/Cs	Each

## 3M™ Fire Barrier Water Tight Sealants (W-Rated)

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
<b>Watertight Spray</b> 	Up to 3-hr Joint Firestop	5.0 gal.	Red	Pail	000-76308-98232-4	1/Cs	Each
	Up to 3-hr Joint Firestop	5.0 gal.	White	Pail	000-76308-86113-1	1/Cs	Each
<b>3000 WT</b> 	Intumescent Silicone (Up to 4-hr Penetration Firestop)	10.1 oz.	Grey	Tube	000-51115-16593-1	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	20 oz.	Grey	Sausage	000-51115-18788-9	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	4.5 gal.	Grey	Pail	500-51115-16594-3	1/Cs	Each
<b>1000 NS</b> 	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	10.1 oz.	White	Tube	000-51115-11535-6	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	20 oz.	White	Sausage	000-51115-18790-2	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	4.5 gal.	White	Pail	500-51115-11537-5	1/Cs	Each
<b>1003 SL</b> 	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	10.1 oz.	White	Tube	000-51115-11538-7	12/Cs	Each
	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	20 oz.	White	Sausage	000-51115-18789-6	12/Cs	Each
	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	4.5 gal.	White	Pail	500-51115-11540-5	1/Cs	Each