

RectorSeal®

Blaze Foam™



A CSW Industrials Company

Intumescent Firestop Foam

For Head of Wall Applications Dynamic & Static

Blazing Fast


Firestop Installation



Install in 1 Easy Step

Manufactured in
USA

Product Code
66024

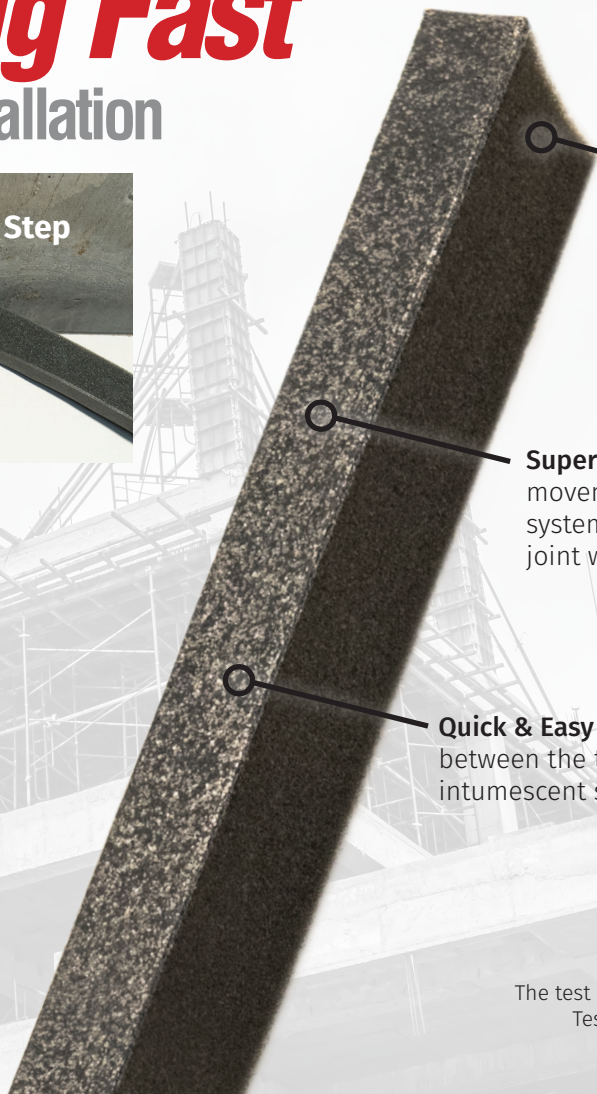

Intumescent Strip - Expands when exposed to heat, forming a high-strength insulating char

Superior Compressible Foam - Provides dynamic movement with up to 50% compression (see UL systems) and 100% extension capabilities for max joint width 1/4" to 1".

Quick & Easy Installation - Simply compress into the joint between the top of the wall and bottom of the deck with intumescent strip facing down.

STC Rating 64

The test was performed in accordance with ASTM E-90-09, Standard Test Method for Laboratory Measurements of Airborne Sound Transmission Loss of Building Partitions.

US Patent No. 6,207,085
US Patent No. 9,683,364 L
licensed from CEMCO Inc.



Not Affected by
Temperature



Quick &
Easy Install



No Hazardous
Ingredients



No Mechanical
Fastening Required



Tested to
UL-2079