



**westcoat.**  
SPECIALTY COATING SYSTEMS

# Texture-Crete®

Resurface and beautify existing concrete with Texture-Crete, a series of polymer modified cementitious coatings designed to resurface concrete. Texture-Crete transforms plain concrete into a durable smooth or textured finish. Easily simulate tile, flagstone, slate, and more with a wide variety of protective Westcoat finishes in gloss, satin or a natural look.



**TC**

**TEXTURE COAT**  
DECORATIVE TEXTURED SURFACES



**westcoat.**

Add texture. Add dimension.  
Our Texture Coat product line transforms plain concrete into decorative, durable, textured works of art. Texture Coat's finishes work equally well on old or new concrete and are perfect for simulating the look of flagstone, slate, stone, pavers, tile, or create a look all your own.

**westcoat.**  
SPECIALTY COATING SYSTEMS

770 Gateway Center Drive San Diego, CA 92102  
800-250-4519 • Fax 619-262-8606 • westcoat.com

FOR PROFESSIONAL USE ONLY



**F O R P R O F E S S I O N A L U S E O N L Y**

**Versatile**

Texture-Crete can be installed in a variety of settings including but not limited to driveways, walkways, patios, courtyards, entryways, showrooms, and pool decks in both commercial and residential environments.

**Texture-Crete Standard**

Texture-Crete Standard is a series of polymer modified cementitious coatings that is bonded to the concrete with a variety of textures, colors and sealers. Texture-Crete is a decorative topping designed to change plain concrete into a very decorative, durable, and textured finish.

**Texture-Crete Custom**

Texture-Crete Custom Finish is a series of polymer modified cementitious coatings that is bonded to the concrete with a variety of finishes and sealers. Texture-Crete Custom Finish is a decorative topping made to change plain concrete into a very decorative, durable, textured finish. Various patterns can be simulated from tile to flagstone and more.

**Texture-Crete Broom-On**

Texture-Crete Broom-On is a polymer modified cementitious coating finished with a highly durable acrylic sealer. Texture-Crete Broom-On is designed to restore old, rough, stained or poorly finished concrete.

**TC Slope & Patch**

TC Slope & Patch is a mixture of acrylic cement and cement modifier developed to aid in patching, sloping or repairing concrete in conjunction with Texture-Crete. TC Slope can be used for feather patching or sloping projects.

**Advantages**


- Decorative
- Cost-effective
- Fast drying
- Low maintenance
- Durable
- Available skid-resistant finish
- Optional solvent-free installation
- Variety of textures and patterns
- Applied over existing concrete
- UV resistant options

**Texture-Crete Standard**




Primer Slurry Knockdown Color and Seal Texture

**Texture-Crete Custom**

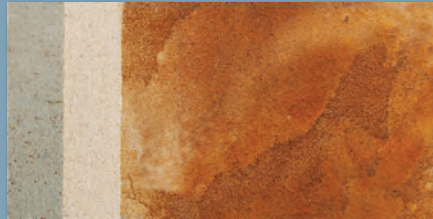

Primer Slurry Skip Trowel Stain and Seal Texture



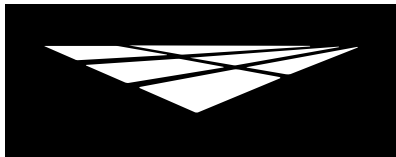


**Description**

Texture-Crete<sup>®</sup> System is a series of polymer-modified cementitious coatings that are bonded to the concrete with a variety of optional finishes and sealers. Texture-Crete<sup>®</sup> is a decorative topping designed to change plain concrete into a very decorative, durable and textured finish. Refer to the Texture-Crete<sup>®</sup> Custom Finish System for various patterns that can be simulated, from tile to flagstone and more.

**Uses**

Texture-Crete<sup>®</sup> systems were created to resurface concrete that is aesthetically unattractive. Some uses include driveways, walkways, patios, garage floors, courtyards, entryways, showrooms and pool decks. Texture-Crete<sup>®</sup> can be installed in both the commercial and residential environment. May also be used in interior living areas, as well as office space.

**System Overview**

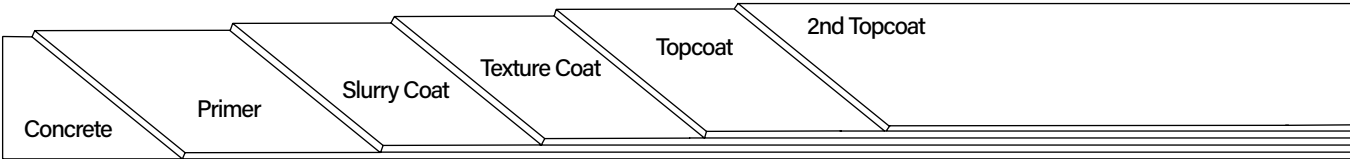


System Data					
<b>Coverages</b>	<b>Primer</b> 250-350 ft <sup>2</sup> per gallon	<b>Slurry Coat</b> 100-150 ft <sup>2</sup> per batch	<b>Texture Coat</b> 150-200 ft <sup>2</sup> per batch	<b>Top Coat</b> 200-300 ft <sup>2</sup> per gallon	<b>2nd Top Coat</b> 200-300 ft <sup>2</sup> per gallon
<b>Components</b>	<a href="#">WP-47A Seam Tape</a> <a href="#">EC-72 Epoxy Patch Gel</a> <a href="#">EC-11 Water-Based Epoxy</a> <a href="#">TC-1 Basecoat Cement</a> <a href="#">TC-3 Medium Texture Cement</a> <a href="#">WP-81 Cement Modifier</a> <a href="#">SC-10 Acrylic Topcoat</a>		<b>Shelf Life</b> 1 year 2 years 3 years 1 year 1 year 2 years 2 years		

**Advantages**

Cost Effective • Fast Drying • Low Maintenance • Long Lasting • Skid Resistant Finish Available  
 • Unlimited Colors • Attractive • Interior or Exterior • Can be Installed Solvent Free • Variety of Textures and Patterns

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

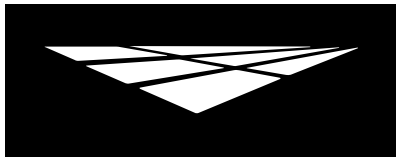

**westcoat**<sup>®</sup>  
SPECIALTY COATING SYSTEMS

**SYSTEM  
SPECIFICATION**

**TC**

**TEXTURE COAT**  
DECORATIVE TEXTURED SURFACES

**Texture-Crete<sup>®</sup> Standard Finish**

### **Inspection**

Concrete must be clean, dry and free of grease, paint, oil, dust, curing agents, laitance or any foreign material that will prevent proper adhesion. The concrete should be at least 2,500 PSI, porous and able to absorb water. A minimum of 28 days curing time is required on all concrete. Prior to starting work, test existing concrete slab for efflorescence, moisture and hydrostatic pressure.

### **Moisture**

All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), please refer to the EC-15 Moisture Vapor Barrier Product Specification Sheet.

### **Preparation**

Pre-cut and clean all cracks and joints with a concrete diamond blade to at least ¼ x ¼ inch. Prepare concrete to a profile equal to CSP 3 as specified by ICRI. Methods may vary according to the thickness of the coating to be applied and the condition and hardness of the concrete. Other factors include the forecasted use of the surface and the environment in which it is to be installed. When preparing the surface, use caution when shot blasting around pools, scarifying too aggressively, leaving grind marks or grinding too smooth.

### **Crack Treatment**

Fill cracks with EC-72 Epoxy Patch Gel. WP-47A Seam Tape may also be used to help reinforce, in which case the EC-72 should be placed into the tape and smoothed with a trowel or putty knife. Broadcast fine silica onto the wet epoxy to provide a surface for the Texture-Crete<sup>®</sup> to bond. EC-72 should be allowed to dry completely prior to slurry coat application. This is a remedial approach to patch cracks and there is no guarantee that cracks will not reappear.

### **Concrete Repair**

For concrete that needs repairs beyond just dormant cracks, TC-23 Mortar Mix can be used. TC-23 is designed to be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material under most Westcoat systems. Please refer to the TC-23 Mortar Mix Product Specification Sheet for details.

### **Free Style Pattern**


Another way to deal with cracks is to cut a pattern using a crack chaser. While the slurry is being installed, clean out expansion joints and cracks with a margin trowel. Then simply incorporate a pattern of "fake cracks" along with the existing cracks, which create the look of flagstone by cutting with a crack chaser into any pattern you choose.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102  
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 5  
Texture-Crete<sup>®</sup> Standard 7/21

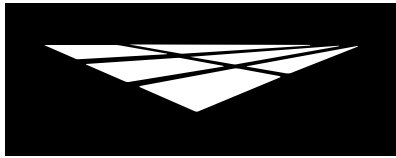

**westcoat**<sup>®</sup>  
SPECIALTY COATING SYSTEMS

**SYSTEM  
SPECIFICATION**

**TC**

**TEXTURE COAT**  
DECORATIVE TEXTURED SURFACES

**Texture-Crete<sup>®</sup> Standard Finish**

### Primer

Premix each component separately. In a clean bucket, mix 2 parts A with 1 part B (by volume) of EC-11. Mix thoroughly with a low speed (400-600 rpm) drill motor for 3-4 minutes. Make sure to scrape the sides and bottom of the container during mixing. EC-11 can be thinned with water, up to 50%. After mixing, dip and roll or spray and back roll the EC-11 onto the surface at a rate of 250-350 square feet per gallon. Do not allow material to puddle. Allow EC-11 to become tacky and trowel slurry coat into tacky primer. Do not let the primer dry and shell over, as this may prevent the slurry coat from properly adhering. Alternatively, you can roll the EC-11. Immediately broadcast 30 grit silica sand to refusal and allow the EC-11 to dry (1-4 hours at 70F degrees). Remove all loose sand prior to installing the slurry coat.

### Slurry Coat

Create the slurry coat by adding one gallon of WP-81 Cement Modifier and up to ½ gallon of water into a clean mixing bucket and add one bag of TC-1 Basecoat Cement. Mix until uniform with a mechanical mixer at a low rpm. Trowel the slurry mix into the damp primer over the surface to achieve a smooth finish. Each batch will cover 100-150 square feet. Using a brush wet with water, feather all outside edges, seams and expansion joints. Apply the slurry coat continuously, keeping a "wet edge", blending each new mix into the prior mix. Stop only at existing seams in the concrete. After surface is dry, scrape or grind off any ridges or trowel marks. Re-apply slurry as needed to smooth all surfaces, being sure to honor all expansion joints.

### Texture Coat

Pour one gallon of WP-81 Cement Modifier in a clean mixing bucket and add one bag of TC-3 Medium Texture Cement. Mix thoroughly with a mechanical mixer at a low rpm. Add up to ½ gallon of water to achieve the desired consistency. Using an acoustical hopper gun, spray the texture onto the deck with a circular motion to achieve approximately 70% coverage at a rate of about 150 to 200 square feet per batch. Spray continuously, do not stop in the middle of the deck. After a few moments, depending on the temperature, the texture must be "knocked down". Use a rounded pool trowel for best results. Wipe the trowel clean with a wet rag as needed. For an Orange Peel Texture, increase the air pressure and reduce the hole size on the hopper gun. Spray texture evenly at an 80% to 90% coverage rate. If you are unsatisfied with the results, immediately scrape off and re-spray. After the texture has dried (30 minutes to 1 hour at 70 degrees) lightly scrape any trowel marks and vacuum the surface prior to sealing. To avoid making impressions, the applicator should wear spiked shoes.

### Topcoat


Mix all containers of SC-10 Acrylic Topcoat to ensure a consistent color. The material may be thinned by adding up to a maximum of one quart of water per gallon to avoid streaks (especially in hot weather). Roll two thin applications of SC-10 using a ¾ inch roller at a rate of 200-300 square feet per gallon. Roll the material in two directions to achieve a uniform finish. Coverage will vary according to texture. For best results, allow SC-10 4-6 hours drying time at 70 degrees before permitting light pedestrian traffic or additional coats are applied. Allow 24 hours to cure before heavy traffic is permitted. Allow 48 hours before heavy objects are placed on the surface and allow 72 hours for vehicular traffic.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102  
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 5  
Texture-Crete<sup>®</sup> Standard 7/21

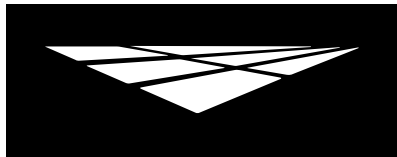

**westcoat**<sup>®</sup>  
SPECIALTY COATING SYSTEMS

**SYSTEM  
SPECIFICATION**

**TC**

**TEXTURE COAT**  
DECORATIVE TEXTURED SURFACES

**Texture-Crete**<sup>®</sup> Standard Finish

### Optional Materials

#### Sloping

- TC-30 Slope Mix can be used to patch and fill holes, as well as correct slope or drainage issues, in concrete under the Texture-Crete System. Please read the TC Slope & Patch System Specification for details.

#### Concrete Repair Options

- TC-23 Mortar Mix may be used as a general concrete repair mix for horizontal and vertical applications and can be used as a patching/underlayment material.

#### Primer

- WP-81 Cement Modifier diluted one part to four parts water, can be used in lieu of EC-11, when a cost-effective, acrylic primer is desired.
- EC-12 Epoxy Primer can be used in lieu of EC-11, when maximum adhesion and 100% solids epoxy is desired. When using EC-12, apply at 200-300 square feet per gallon and broadcast 30 grit silica sand to refusal.

#### Skid Resistance

- CA-30 Small Safe Grip or CA-31 Large Safe Grip can be added to the final coat of SC-10 for added skid resistance.

#### Additional Topcoat

- SC-42 WB Acrylic Sealer may be applied over the SC-10 for added sheen and chemical resistance.

\* Please refer to Product and System Specification Sheets for additional information.

### Clean Up

Uncured material can be removed with soap and warm water. If cured, material can be removed mechanically or with an environmentally-safe solvent.

### Maintenance

Exterior surfaces can be swept daily with water and a broom. For tougher dirt or grease, use degreaser diluted with water 20:1 and a soft bristle brush or broom. Be sure to rinse well. To remove calcium or lime build up, brush diluted 100 grain vinegar onto the surface; be sure to rinse any residue.

The Texture-Crete<sup>®</sup> System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat sealer every 3 to 5 years depending upon traffic and UV exposure. Contact the original installer of Westcoat for complete re-coating instructions.

### Health Precautions


Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Cements contain silicas; dust mask or respirator should be used when mixing, sanding or grinding.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102  
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 5  
Texture-Crete<sup>®</sup> Standard 7/21

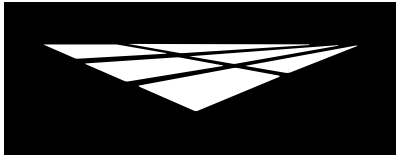

**westcoat**<sup>®</sup>  
SPECIALTY COATING SYSTEMS

**SYSTEM  
SPECIFICATION**

**TC**

**TEXTURE COAT**  
DECORATIVE TEXTURED SURFACES

**Texture-Crete**<sup>®</sup> Standard Finish

### Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- Rain will wash away uncured Westcoat acrylic products.
- If inclement weather threatens, cover deck to protect new application.
- Sealers will make the surface slippery, please be aware the texture of the surface and how the sealer will affect the look, feel and skid resistance.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Do not allow Westcoat products to freeze.

### Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

### Test Data

Test	Texture-Crete <sup>®</sup> Standard
Bond Strength to Concrete (ASTM C297)	278 PSI
Bond Strength after accelerated aging (ASTM C756)	249 PSI
Abrasion Test (ASTM D1242)	11% reduction
Freeze thaw on concrete (ASTM C67)	171 PSI
Concentrated Load (AC39)	No apparent damage
Water absorption (ASTM D570)	6.5%
Percolation Test (AC39 Sect. 4 G)	.25 Inches
Tensile Strength (ASTM C190-85)	855 PSI
Compressive Strength (ASTM C109-88)	5690 PSI
Flexural Strength	1835 PSI
Impact Strength	22 in/lbs

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102  
800-250-4519 • Fax 619-255-7187 • westcoat.com

5 of 5  
Texture-Crete<sup>®</sup> Standard 7/21





## SECTION 099726

### Cementitious Coatings

#### PART 1 GENERAL

##### 1.01 SUMMARY

- A. Section includes: Provide a complete acrylic based cementitious coating system for concrete surfaces that meet the requirements for specific use indicated in the contract documents. Include all applicable substrate testing, surface preparation, and detail work.

##### 1.02 RELATED SECTIONS

- A. Section 033000 – Cast-In-Place Concrete
- B. Section 090000 – Finishes

##### 1.03 SUBMITTALS

- A. Submit under provisions of Section 013300.
- B. Product Data: Submit manufacturer's product data sheets on each product and system to be used including:
  - 1. Preparation instructions and recommendations.
  - 2. Storage and handling requirements.
  - 3. Installation methods.
  - 4. Maintenance requirements.
- C. Selection Samples: For each system specified, provide two sets of samples and color charts, representing manufacturer's full range of colors and patterns.

##### 1.04 QUALITY ASSURANCE

- A. All materials used in the cementitious coating system shall be manufactured and provided by a single manufacturer to ensure compatibility and proper bonding.
- B. Use adequate numbers of skilled workmen that are thoroughly trained and experienced in the necessary crafts and completely familiar with the specified requirements and methods needed for proper performance of the work of this section.
- C. Contractor shall have a minimum of three years experience installing cementitious coatings similar to that which is required for this project and who is acceptable to the manufacturer.
  - 1. Applicator shall designate a single individual as project foreman who shall be on site at all times during installation.
  - 2. Contractor must show and have QCA Qualified Contractor/Applicator paperwork from the manufacturer of the coating system, as required to obtain a long-term jobsite specific warranty.
- D. Convene a meeting before the start of application of coating system. Require attendance of parties directly affecting work of this section, including: architect, contractor, applicator, and authorized representative of the coating system manufacturer and interfacing trades. Review the following:
  - 1. Drawings and specifications affecting work of this section.
  - 2. Protection of adjacent surfaces.
  - 3. Surface preparation and substrate conditions.
  - 4. Application.
  - 5. Field quality control.
  - 6. Protection of coating system.



7. Repair of coating system.
8. Coordination with other work.

#### 1.05 DELIVERY, STORAGE & HANDLING

- A. Delivery: Materials shall be delivered to the job site in sealed, undamaged containers. Each container shall be clearly marked with manufacturer's label showing type of material, color, and lot number.
- B. Storage: Store all materials in a clean, dry place with a temperature range in accordance with manufacturer's instructions.
- C. Handling: Handle products carefully to avoid damage to the containers. Read all labels and material safety data sheets prior to use.

#### 1.06 PROJECT SITE CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within the limits recommended by the manufacturer.
- B. All concrete should be tested for moisture before applying a seamless coating. If moisture emissions exceed 5 lbs/1000 square feet (ASTM F1869) or if the relative humidity (RH) exceeds 75% (ASTM F2170), see EC-15 Moisture Vapor Barrier product specification.
- C. Concrete must be at least 2500 psi.
- D. Concrete must be cured for a minimum of 28 days before coating is applied.
- E. Schedule coating work to avoid excessive dust and airborne contaminants. Protect work areas from excessive dust and airborne contaminants during coating application.
- F. Before any work is started, the applicator shall examine all surfaces for any deficiencies. Should any deficiencies exist, the architect, owner or general contractor shall be notified in writing and any corrections necessary shall be made.

#### 1.07 WARRANTY

- A. Upon completion of the work in this section provide a written warranty from the manufacturer against defects of materials for a period of 5 (five) years. To obtain project specific warranty the coating system applicator must be a Westcoat Qualified Contractor/ Applicator and apply for warranty.

### **PART 2 PRODUCTS**

#### 2.01 MANUFACTURERS

- A. Acceptable manufacturer: Westcoat Specialty Coatings; 4007 Lockridge Street, San Diego, CA 92102, San Diego, CA 92102. Telephone 800-250-4519. Fax 619-255-7187. Website: [www.westcoat.com](http://www.westcoat.com).

#### 2.02 MATERIALS

- A. As basis of design Westcoat Texture-Crete System (no substitutions will be accepted): A series of polymer modified cementitious coatings bonded to concrete and sealed with an acrylic topcoat.

#### 2.03 COMPONENTS

- A. Westcoat Texture-Crete System: Decorative cementitious coating designed for concrete resurfacing.
  1. Primer: EC-11 Water-Based Epoxy, 2 parts A to 1 part B (by volume). Primer applied at 250-350 square feet per gallon.
  2. Slurry Coat: Combine and mix one 50 pound bag of TC-1 Basecoat Cement, 1 gallon of WP-81 Cement Modifier, and up to ½ gallon of water. Apply at 100-150 square feet per batch.
  3. Texture Coat: Combine and mix one 50 pound bag of TC-3 Medium Texture Cement, 1 gallon of WP-81 Cement Modifier, and up to ½ gallon of water. Apply texture using acoustical hopper gun, spraying in a circular motion to achieve 70% coverage at a rate of about 150-200 square feet per batch.

4. Topcoat: Mix all containers of SC-10 Acrylic Topcoat to ensure consistent color. Apply two thin coats of SC-10 at a rate of 200-300 square feet per gallon.

## 2.04 ACCESSORIES

### A. Supplemental Materials:

1. Patching materials: EC-72 Epoxy Patch Gel.
2. Concrete repairs can be made with TC-23 Mortar Mix as needed.
3. WP-47-3 Seam Tape for crack repair.
4. Optional aggregate: be CA-30 Safe Grip added to sealer.
5. Optional primer: WP-81 Cement Modifier or EC-12 Epoxy Primer can be used in place of the EC-11 Water Based Epoxy.

### Optional Topcoats:

6. SC-42 WB Acrylic sealer may be used over the SC-10 when added sheen and chemical resistance is required.
7. SC-65G WB Gloss Polyurethane may be used over the SC-10 when a low odor, solvent free, mar and chemical resistant gloss finish is required.
8. SC-65SG Pigmented WB Semi-Gloss Polyurethane may be used in place of SC-10 when a low odor, solvent free, mar and chemical resistant semi-gloss finish is required.
9. SC-65F WB Flat Polyurethane may be used over the SC-10 or SC-65SG Semi Gloss when a low odor, solvent free, mar and chemical resistant flat finish is required.
10. EC-95G Gloss Polyurethane Topcoat may be used in place of SC-10 when a gloss, solvent-based polyurethane is required.
11. EC-95F Flat Polyurethane Topcoat may be used over the EC-95G when a satin, solvent-based polyurethane is required.

## 2.05 SOURCE QUALITY CONTROL

### A. Verification of Performance

1. Physical Properties: The finish Texture-Crete System shall have the following approximate performance characteristics:

a. Bond Strength to concrete (ASTM C297)	278 PSI
b. Bond Strength after accelerated aging (ASTM C756)	249 PSI
c. Abrasion Test (ASTM D1242)	11% reduction
d. Freeze thaw on concrete (ASTM C67)	171 PSI
e. Concentrated load (AC39)	No apparent damage
f. Water absorption (ASTM D570)	6.5%
g. Percolation test (AC39 Sec. 4 G)	.25 inches
h. Tensile Strength (ASTM C190-85)	855 PSI
i. Compressive Strength (ASTM C109-88)	5690 PSI
j. Flexural Strength	1835 PSI
k. Impact Strength	22 in/lbs.

## PART 3 EXECUTION

### 3.01 EXAMINATION

#### A. Verification of Conditions.

1. Inspect all surfaces to receive cementitious coating. Verify that surfaces are dry, clean, and free of contaminants that would prevent epoxy flooring from properly adhering to the surface.
2. Conduct calcium chloride testing according to ASTM F1869.
3. Before starting work, report in writing to the authority having jurisdiction any unsatisfactory conditions.

### 3.02 SURFACE PREPARATION

- A. Prepare surfaces using methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- B. Prepare concrete to a profile equal to CSP 3 as specified by ICRI.

- C. Clean Surfaces thoroughly prior to installation.
- D. Rout and clean moving cracks and joints: fill with manufacturer's recommended flexible epoxy filler material.
- E. Repair any non-moving surface deviations with manufacturer's recommended patching material.

### 3.03 INSTALLATION

- A. Install coatings in accordance with manufacturer's instructions.
- B. Mix all materials in accordance with manufacturer's instructions.
- C. Use application equipment, tools, and techniques in accordance with manufacturer's instructions.
- D. Uniformly apply coatings at spread rates and in number of coats to achieve specified coverage.
- E. Adhere to all limitations, instructions, and cautions for cementitious coating as stated in the manufacturer's published literature.

### 3.04 FIELD QUALITY CONTROL

- A. Verify coatings and other materials are as specified.
- B. Verify coverages and finish of the system as work progresses.
- C. Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of coating systems.

### 3.05 PROTECTION AND CLEAN-UP

- A. Installation areas must be kept free from traffic and other trades during the application procedure and cure time.
- B. Protect finished surfaces of coating system from damage during construction.
- C. Touch-up, repair or replace damaged flooring system after substantial completion.
- D. Clean area and remove all debris upon completion of work. Dispose of empty containers properly according to current local, state and federal regulations.
- E. Allow material to cure 4 to 6 hours before light pedestrian traffic is permitted, 24 hours before heavy traffic, and 72 hours before vehicular traffic is permitted.

### 3.06 MAINTENANCE

- A. Contractor shall provide to owner, maintenance and cleaning instructions for the cementitious coating system upon completion of work. Owner is required to clean and maintain the surfaces to maintain manufacturer's warranty.

## END OF SECTION

*This guide specification has been prepared by Westcoat Specialty Coating Systems to assist design professionals in developing a project specific specification. This guide is a template that must be reviewed and adapted by specifiers to comply with project requirements. This guide specification is not to be copied directly into a project specification manual without review.*



Travatan | 40



Sandy Beige | 78



Spanish Brown | 43



Arizona Tan | 82



Rocky Nook | 26



Sand | 11



Omaha Tan | 53



Deep Tan | 27



Concrete Gray | 52



Pewter Gray | 12



Cape Cod Gray | 41



Stone Gray | 42



Espresso | 74



Mission Red | 76



Tile Red | 34



Slate Blue | 14

**NEW COLORS**



Anchor Gray | 80



Rosewood | 77



Porcelain | 75



Cashew | 79

**SOLAR REFLECTIVE (SR) SERIES**



Coral | 106



Powder Blue | 104



Butterscotch | 105



Heather Gray | 103



Salmon | 108



Lime | 109




Winter Mint | 102



Coconut | 110



Seaside | 107



Canvas | 111



SR Gray\* | 101



SR Tan\* | 100

\*SR Gray and SR Tan meet the Cool Roof requirements of California Title 24, when installed per the Solar Reflective System instructions.

\*Black and White also available but not shown.



**CAUTION:**

Color will vary between products and sheens. This chart is for reference only. Please request an actual color sample or apply sample on site before beginning any project.





Color   Product Number	Availability
Arizona Tan   82	Stock
Black   56	Made To Order
Cape Cod Gray   41	Stock
Clear   98	n/a
Concrete Gray   52	Stock
Custom   Cus	Made To Order
Deep Tan   27	Stock
Espresso   74	Made To Order
Mission Red   76	Stock
Omaha Tan   53	Stock
Pewter Gray   12	Stock
Rocky Nook   26	Stock
Sand   11	Stock
Sandy Beige   78	Stock
Slate Blue   14	Made To Order
Spanish Brown   43	Stock
Stone Gray   42	Stock
Tile Red   34	Made To Order
Travatan   40	Stock
White   00	n/a
White/Base   96	Stock
Mid Base   97	Stock
Clear Base   98	Stock
Safety Red   90	n/a
Safety Yellow   91	n/a

New Colors	Availability
Porcelaine   75	Made To Order
Rosewood   77	Made To Order
Cashew   79	Made To Order
Anchor Gray   80	Made To Order
SR Series	Availability
SR Tan   100	Made To Order
SR Gray   101	Made To Order
Winter Mint   102	Made To Order
Heather Gray   103	Made To Order
Powder Blue   104	Made To Order
Butterscotch   105	Made To Order
Coral   106	Made To Order
Seaside   107	Made To Order
Salmon   108	Made To Order
Lime   109	Made To Order
Coconut   110	Made To Order
Canvas   111	Made To Order

Lead times based on 1, 1.5, and 2 gallon units

Stock = 2 day lead time | Made To Order = 10 day lead time

Extended manufacturing time may apply to larger volume orders.

Custom Colors available with color matching fee, minimum order and extended manufacturing time.

