



VC-5™

VAPOR EMISSION CONTROL FOR NEW CONCRETE

SINAK VC-5™ is a ready-to-use, zero VOC Moisture Vapor Control System that eliminates flooring or roofing failures due to moisture, moisture vapor, hydrostatic pressure, and alkalinity emanating from or through the concrete. VC-5™ is designed for use on all structural and lightweight concrete to receive finished flooring, roofing, or coatings.




FEATURES & BENEFITS

- 20-YEAR LABOR, MATERIAL AND ADHESIVE BOND WARRANTY
- COMPATIBLE WITH ALL ADHESIVE AND FLOORING SYSTEMS
- UL® GREENGUARD GOLD CERTIFIED
- CONTRIBUTES TO LEED V4 CREDITS
- SAVES 7-21 DAYS FROM THE CONSTRUCTION SCHEDULE PER CONCRETE POUR

VC-5™ replaces all curing methods, moisture mitigation, and remediation systems. Use of VC-5™ allows for same day slab access and installation of any flooring, coating, or roofing in as soon as 7 days after concrete placement, saving weeks off the construction schedule. VC-5™ is guaranteed to eliminate costly delays from moisture remediation.

VC-5™ warrants all adhesives, flooring and roofing systems with a 20-year non-prorated labor, material, and adhesive bond warranty. VC-5™ allows mechanical surface profiling up to ¼" amplitude. VC-5™ ensures compatibility and bond of all flooring adhesives, floor coverings, roofing systems, and surface treatments. VC-5 is non-toxic, contains no solvents, and is listed as UL® GREENGUARD Gold Certified and super compliant with SCAQMD.

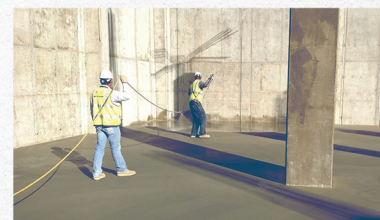

WHERE TO USE VC-5™

- STRUCTURAL & LIGHTWEIGHT CONCRETE
- RUBBER TILES & SHEETING
- VINYL COMPOSITION TILES
- SHEET VINYL
- CARPETS
- LAMINATE FLOORING
- HARDWOOD
- SPORT FLOORING
- EPOXY & URETHANE COATINGS
- UNDERLAYMENTS & RESURFACING SYSTEMS
- HOT & COLD APPLIED ROOFING
- ENGINEERED FLOORING

SUSTAINABLE DESIGN REQUIREMENTS

- Zero VOC's
- UL 2818 Gold - GREENGUARD® Certified.
- Listed as Super-Compliant by the South Coast Air Quality Management District (SCAQMD).
- Exceeds the regulatory limits in the SCAQMD Rule 1113.
- Meets the requirements to contribute for LEED credit in the following areas: EQ Credit 1.0, 4.1 and 4.3, EQ Credit 10 3.1, MR Credit 5.1 and 5.2



TESTING

- **ASTM C-39** (Compressive Strength): Equal to 28-day water cure results.*
- **ASTM C-1202** (Chloride Ion Penetration) (Coulombs): Equal to 28-day water cure.*
- **BS-1881 P5** (Initial Surface Absorption): Superior to 7-day water cure.*
- **ASTM C-309** Type 1, Class A Complies with Section 6: Water Retention

*Independent laboratory reports are available upon request.

INSTALLATION

Installation should be continuous. VC-5™ application should begin after the surface is firm enough to tolerate foot traffic or immediately after the early entry saw cutting. Apply a small test area to confirm penetration. If rain should occur at any time during this process, see 'Interrupted Installation' at the end of this section.

1. Protect objects and areas not to be treated from spillage or overspray.
2. Apply first coat of VC-5™ uniformly wetting the surface with an airless or tank-type sprayer. **CAUTION:** First coat must be completely dry before the application of the second coat.
3. Immediately after the first coat is dry, apply a second coat. Apply the second coat perpendicular to the first coat to create a crosshatched pattern. Drying time will vary from 10 to 30 minutes depending on temperature and environment. **NOTE:** "Dry" means dry to the touch.
4. Clean all equipment with warm soapy water.

INTERRUPTED INSTALLATION

If the application should be interrupted by rain, mark the place of interruption and continue the application as soon as weather permits. If the delay exceeds 4 hours contact SINAK immediately.

COLD WEATHER INSTALLATION

DO NOT apply below 34°F (1°C). Allow ample time between coats for drying. If the temperature is expected to drop below 32°F (0°C), cover treated areas with thermal blankets. Contact SINAK for additional information.

PRECAUTIONS

For use on freshly placed concrete surfaces only. Hardwood and engineered glue down wood floors (may) require an application of SINAK V-Poxy™. Do not allow VC-5™ to come into contact with any glass, metal, or painted surfaces. VC-5™ left to dry on the surface may result in streaking, whitening, or staining. Immediately wipe affected surfaces with a clean water-saturated cloth, then wipe dry with a second clean cloth. For questions regarding VC-5™ contact SINAK.

COVERAGE RATES

Two-coat coverage rate is 300 sq ft per gallon (7 sq m per liter) for smooth troweled concrete.

STORAGE & HANDLING

VC-5™ has an indefinite shelf life when stored in a cool dry area out of direct sunlight. Must be kept in tightly secured containers to prevent evaporation and contamination. VC-5™ MUST be protected from freezing. Product that has frozen will not function as intended and should be discarded.

AVAILABILITY

VC-5™ is available in 5-gallon (18.9-liter) pails, 55-gallon (208.2-liter) drums and 275-gallon(1041-liter) totes from selected distributors.

TECHNICAL ASSISTANCE

Technical assistance is available from the manufacturer.

WARRANTY

A 20-year non-prorated labor and materials warranty is available. Concrete must be placed in accordance with ACI manual section 302.1R-15. SINAK recommends a maximum .45 water/cement ratio be used. Contact SINAK for warranty requirements

SINAK warrants its products to be free from manufacturing defects and to meet the technical properties on the current product information sheet. To the maximum extent permitted by law, this express warranty and the remedies specified below are exclusive and in lieu of all other warranties and remedies. Any implied warranties including without limitation implied warranties of merchantability and fitness for a particular purpose are excluded. SINAK's liability under this product warranty shall be limited to a refund of purchase price or replacement of the product. SINAK shall have no liability for any loss of use, interruption of business, lost profits or goodwill, or for any special, incidental or consequential damages of any kind arising from the purchase or use of the warranted product, even if SINAK has been advised of the possibility of such loss, interruption or damage. This limited warranty may not be modified by representatives of SINAK, its distributors or dealers. Any claim made under this warranty must be made within twenty (20) years of the date of purchase and shall be accompanied by any reports or test results that form the basis of the warranty claim. Prior to settlement of a warranty claim, SINAK shall have the right, but not the obligation, to conduct site inspections and perform tests pertaining to the customer's warranted product and its manner of use.