

BackerBead®

Combination PVC Casing Bead with Built-in Closed Cell Backer Rod

ClarkDietrich BackerBead® eliminates the need to install a backer rod separately, as the product features a factory-applied backer rod that is affixed to the vinyl casing bead and set to the exact height and depth. This allows the installer to create a "gap" on the wall without the hassle of aligning it in the field, thereby saving time and materials.

Applications: Stucco, Stone Veneer

Product Data & Ordering Information:

Product code	Ground (in.)	Size (in.)	Pcs./Box
6650BB	1/2"	1-3/4" flange width perforations	50
6658BB	5/8"	1-3/4" flange width perforations	50
6675BB	3/4"	1-3/4" flange width perforations	50
6678BB	7/8"	1-3/4" flange width perforations	50
66100BB	1"	1-3/4" flange width perforations	50
66125BB	1-1/4"	1-3/4" flange width perforations	50
66150BB	1-1/2"	1-3/4" flange width perforations	40
66175BB	1-3/4"	1-3/4" flange width perforations	40
66200BB	2"	1-3/4" flange width perforations	40

White backer rod optional (for clear sealant). Add -WH to product code, example 6658BBSF-WH. Vinyl Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing. BackerBead also available with a solid flange upon request. Add U to product code, example: 6658BBSFU.

ASTM & Code Standards

Product Specifications

- ASTM D638, ASTM D790, ASTM D256, ASTM D648, ASTM D696
- ASTM D1784 - Standard Classification System and Basis for Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds
- ASTM D4216 Cell Class 13244C - Standard Specification for Rigid Poly Vinyl Chloride (PVC) and Related PVC and Chlorinated Poly Vinyl Chloride (CPVC) Building Products Compounds



Installation Standards

- ASTM C1330 - Standard Specification for Cylindrical Sealant Backing for Use with Cold Liquid-Applied Sealants
- ASTM E331 - Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
- ASTM C1861 - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster. Table, 1, PVC for Exterior.
- ASTM C1780 - Standard Practice for Installation Methods for Cement-Based Adhered Masonry Veneer
- ASTM C841 - Standard Specification for Installation of Interior Lathing and Furring
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs


Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Supports for Plaster)

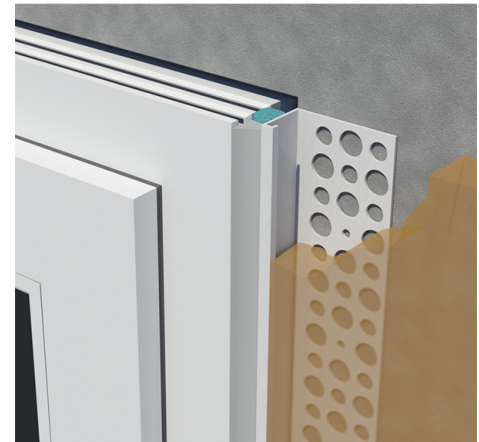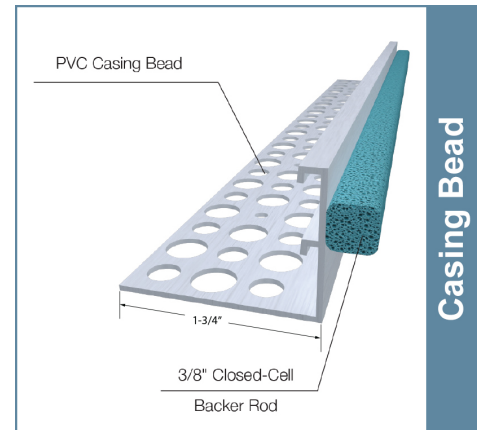

PVC Color Options



*Standard is white.

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: