

## Channel Reveal (with perforated flanges)

Create 1/2" to 4" reveals in stucco and plaster surfaces

Create 1/4" to 4" reveals in stucco and plaster surfaces. Clips are provided for alignment and as a base for sealants. Factory-fabricated intersections of crosses, T's, L's, inside and outside corners, and end closures of channel reveals are available to form clear channels.

**Applications: Stucco**

### Product Data & Ordering Information:

Product Code	Ground	Reveal	Overall width	PCS/Box
CS25-100	1/4"	1"	3-1/8"	50
CS38-100	3/8"	1"	3-1/8"	35
CS50-100	1/2"	1"	3-1/8"	35
CS58-100	5/8"	1"	3-1/8"	25
CS75-100	3/4"	1"	3-1/8"	25
CS78-100	7/8"	1"	3-1/8"	18
CS100-100	1"	1"	3-1/8"	15

Note: All with removable caps (except 1/4" and 3/8" grounds and 2-1/2", 3" and 4" reveals). All with connector clips (except 1/4" grounds).

Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

### ASTM & Code Standards

#### Product Specifications

- ASTM D638 - Standard Test Method for Tensile Properties of Plastics
- ASTM D790 - Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
- ASTM D256 - Standard test Methods for Determining the Izod Pendulum Impact Resistance of Plastics
- ASTM D648 - Standard Test Method for Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position
- ASTM D696 - Standard Test Method for Coefficient of Linear Thermal Expansion of Plastics Between Negative 30 Degrees Celsius and 30 Degrees Celsius with a Vitreous Silica Dilatometer
- ASTM D1784 - Standard Classification System and Basis for Specification for Rigid Poly Vinyl Chloride (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds
- ASTM D4216 Cell Class 13244C - Standard Specification for Rigid Poly Vinyl Chloride (PVC) and Related PVC and Chlorinated Poly Vinyl Chloride (CPVC) Building Products Compounds


#### Installation Standards

- ASTM C1861 - Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster. Table, 1, PVC for Exterior.
- ASTM C1780 - Standard Practice for Installation Methods for Cement-Based Adhered Masonry Veneer
- ASTM C841 - Standard Specification for Installation of Interior Lathing and Furring
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

### 09.22.00 (Supports for Plaster)

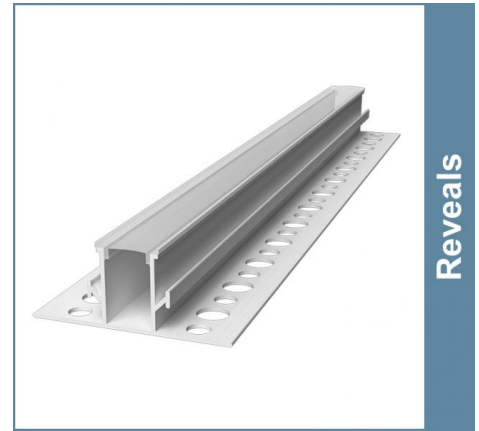

Available in 1/2", 3/4", 1", 1-1/2", 2", 2-1/2", 3" and 4" reveals



#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: