

# VULKEM<sup>®</sup> EWS HIGH-PERFORMANCE COATINGS


Maximum-performance coatings with tenacious adhesion and extreme abrasion resistance

## HEAVY DUTY SYSTEM

### Maximum Protection for Snow Plows, Dumpster Areas and Loading Docks

Tremco's heavy duty system is ideal for loading docks and areas requiring snow plow resistance. Maximum protection from the damaging effects of chloride, deicing salts, chemicals, gasoline, oils and anti-freeze.

Product		Coverage Rate	Wet Mils	Comments
1	Tremco PUMA Primer	90 ft <sup>2</sup> /gal	17	Lightly broadcast silica sand.
2	Tremco PUMA BC	20 ft <sup>2</sup> /gal	80	Allow 45 minutes to cure before proceeding.
3	Tremco PUMA WC with PUMA filler powder	16 ft <sup>2</sup> /gal	100	Broadcast aluminum oxide (bauxite) to refusal. Allow 45 min to cure before proceeding.
4	Tremco PUMA TC	53-90 ft <sup>2</sup> /gal	17-30	Allow 60 minutes to cure before opening to traffic.

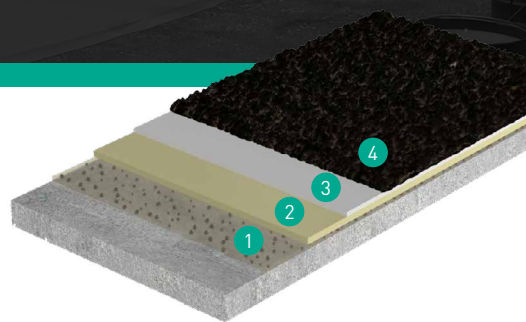

## HELIPAD SYSTEM

### Durable Solution with Custom Color Options

Vulkem EWS is an optimal solution for helipads. Vulkem EWS is a cold-applied, traffic deck coating system designed for waterproofing concrete slabs and protecting occupied areas underneath from water damage.

Product		Coverage Rate	Wet Mils	Comments
1	Tremco PUMA Primer	90 ft <sup>2</sup> /gal	17	Lightly broadcast silica sand.
2	Tremco PUMA BC	20 ft <sup>2</sup> /gal	80	Allow 45 min to cure before proceeding.
3	Tremco PUMA WC with PUMA filler powder	25 ft <sup>2</sup> /gal	65	Broadcast silica sand to refusal.
4a	Tremco PUMA TC	64 ft <sup>2</sup> /gal	25	Allow 45 minutes to cure
4b	Tremco PUMA TC	64 ft <sup>2</sup> /gal	25	Allow 60 minutes to cure before opening to traffic.

