

## #XJ15 Double-J Control Joint (XJ15)

### Expanded flange control joint with a taped reveal for a clean finish

#XJ15 Expanded Flange Control Joint (Double-J) is used to relieve stresses in large plastered areas of walls, ceilings, and stucco areas. This expanded wing control joint minimizes cracking and assures proper plaster and stucco thickness. The Double-J has a 5/16" reveal and rolled outer edges to prevent visible separation cracking. The applied plastic tape keeps the reveal clean and is removed easily after the finish application.

The #XJ15 enables plaster to key into the return lip to eliminate shrinkage separation, a preferred finish feature. The joint is taped, preventing stucco from getting caught inside during installation and providing a neatly finished job upon completion.

The #XJ15 Double-J Control Joint is also available in zinc alloy for increased corrosion resistance.

#### Product Data & Ordering Information:

Material: 26 Gauge, G60 Hot-Dipped Galvanized Steel  
Also available in 99.97% pure Zinc - ASTM B-69 compliant  
Dimensions: 1/2" to 7/8" Grounds, 10' lengths

| Ground | Length | Pcs./Ctn. | Ft./Ctn. | Wt./Ctn. | Ctn./Skid |
|--------|--------|-----------|----------|----------|-----------|
| 1/2"   | 10'    | 24        | 240      | 54 lbs.  | 27        |
| 3/4"   | 10'    | 24        | 240      | 69 lbs.  | 30        |
| 7/8"   | 10'    | 24        | 240      | 76 lbs.  | 30        |

#### ASTM & Code Standards:

- ASTM C841 (interior), C1063 (exterior), CE 240.01, ASTM C926, ML/SFA-920, the International Code Council IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A653/A653M or zinc alloy meeting ASTM B-69 as required in ASTM C1063 and C847.
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)
- For installation and placement instructions refer to ASTM C1063, C841 and C926.

#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.

#### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.



#### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

09.22.36 (Metal Lath)

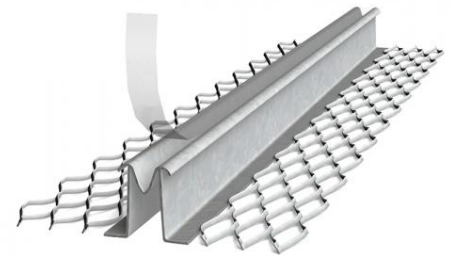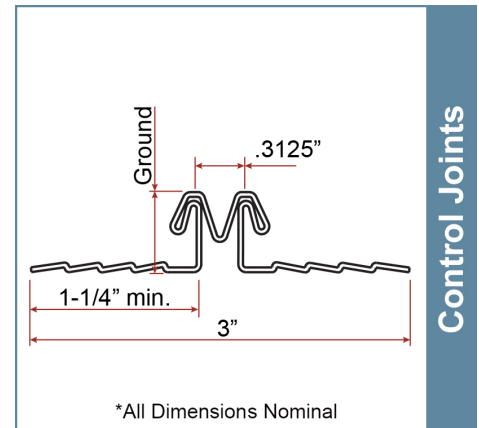

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: