
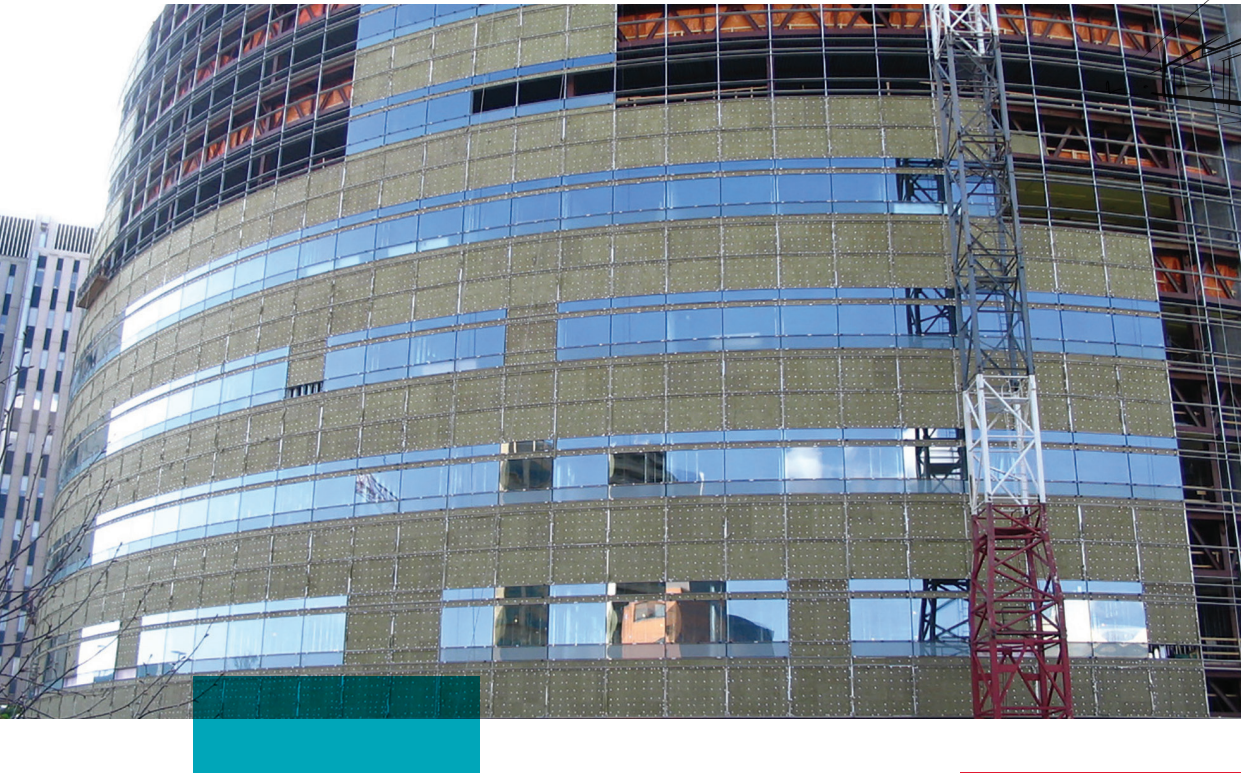


ROXUL SAFE™

Fire Safing Insulation



ROCKWOOL ROXUL SAFE™ is a lightweight, semi-rigid stone wool insulation that provides fire-stopping and acoustical properties. It is designed to fill perimeter gaps between concrete floor slabs and exterior wall systems, between firewalls and ceiling slabs, and around conduit pipes and duct openings through walls and floor slabs.

It is non-combustible and fire resistant, and will not develop toxic smoke or promote flame spread, even when exposed directly to a fire. When ROXUL SAFE™ is used with CURTAINROCK® 40/80, it provides a comprehensive fire-stopping system that has been UL/ULC/Intertek tested and approved for perimeter fire containment systems.

ROXUL SAFE™ also helps to increase energy efficiency, improve thermal stability and reduce noise transmission into and out of the building for overall occupant comfort.

Learn more at rockwool.com

Fire-stopping Material

ROXUL SAFE™ is always used in conjunction with a fire sealant to prevent passage of fire and smoke from one area to the next.



ROCKWOOL ROXUL SAFE™ is semi-rigid, mineral wool batt insulation approved for use in fire rated joints, through penetrations and perimeter fire containment systems.

	Performance	Test Standard
Compliance	Mineral Fiber Block and Board Thermal Insulation - Type IVA Compliant MEA Approval, New York City Approval	ASTM C612 339-97-M
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Test for Non-Combustibility - Non Combustible Fire Tests of Firestop Systems Fire Tests of Penetration Firestop Systems Tests for Fire Resistance of Building Joint Systems Perimeter Fire Barrier Systems Smoulder Resistance - 0.01% Consult UL, ULC and Intertek Directories for fire rated designs	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 CAN/ULC S115 ASTM E814 (UL 1479) UL 2079 ASTM E2307/E119 CAN/ULC S129
Density	Actual Density - 4.5 lbs/ft³ (72 kg/m³)	ASTM C303
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665
Reaction to Moisture	Moisture Sorption by weight - 0.04% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338
Thickness Dimensions	Product is available in 2", 3" and 4" (50.8 mm, 76.2 mm and 101.6 mm) 24" x 48" (610 mm x 1219 mm)	



Please contact ROCKWOOL for
Declare labels for other ROCKWOOL
manufacturing facilities.

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.