



INSULATION, LATH, & BUILDING WRAP ATTACHMENT. CERAMIC COATED.

Weather resistant, ceramic coated self-drilling screws. Available in lengths from 1-5/8" up to 6". Used for attaching continuous insulation, lath, and building wrap to heavy gauge steel studs.

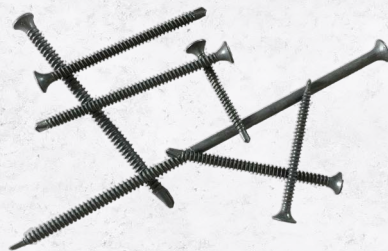

Bulk

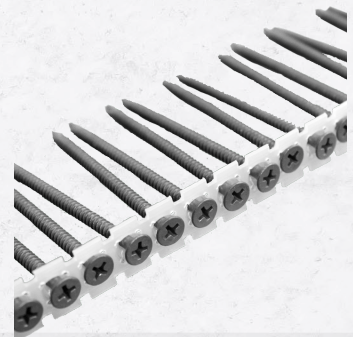

Collated

PRODUCT FEATURES

- Ceramic coating for corrosion resistance.
- Available in bulk (1-5/8" - 6") or collated (1-5/8" - 3").
- Self-drilling for attachment to heavy gauge steel studs (12 ga. thru 18 ga.).
- Phillips drive with bugle head

AVAILABLE LENGTHS & SIZES

- 1-5/8" screw, #6 dia. (Bulk or collated)
- 2" screw, #6 dia. (Bulk or collated)
- 2-1/2" screw, #8 dia. (Bulk or collated)
- 3" screw, #8 dia. (Bulk or collated)
- 3-1/2" screw, #10 dia. (Bulk only)
- 4" screw, #10 dia. (Bulk only)
- 4-1/2" screw, #10 dia. (Bulk only)
- 5-1/2" screw, #10 dia. (Bulk only)
- 6" screw, #10 dia. (Bulk only)

Recommended screw length is dependent on assembly thickness. Minimum of 4 threads penetration through the steel studs is required.



LABOR-SAVING TOOLS AVAILABLE

Use with Grip-Lok[®] Autofeeder Fastening System with various nose adaptors for rapid attachment of lath, insulation, building wrap, etc.



SINCE 1823

ALTENLOH, BRINCK & CO. US, INC.
ALTENLOH, BRINCK & CO. - GROUP

TRUFAST[®]

WALLS