


# 3M™ Fire Protection Products Typical Applications — Commercial Construction

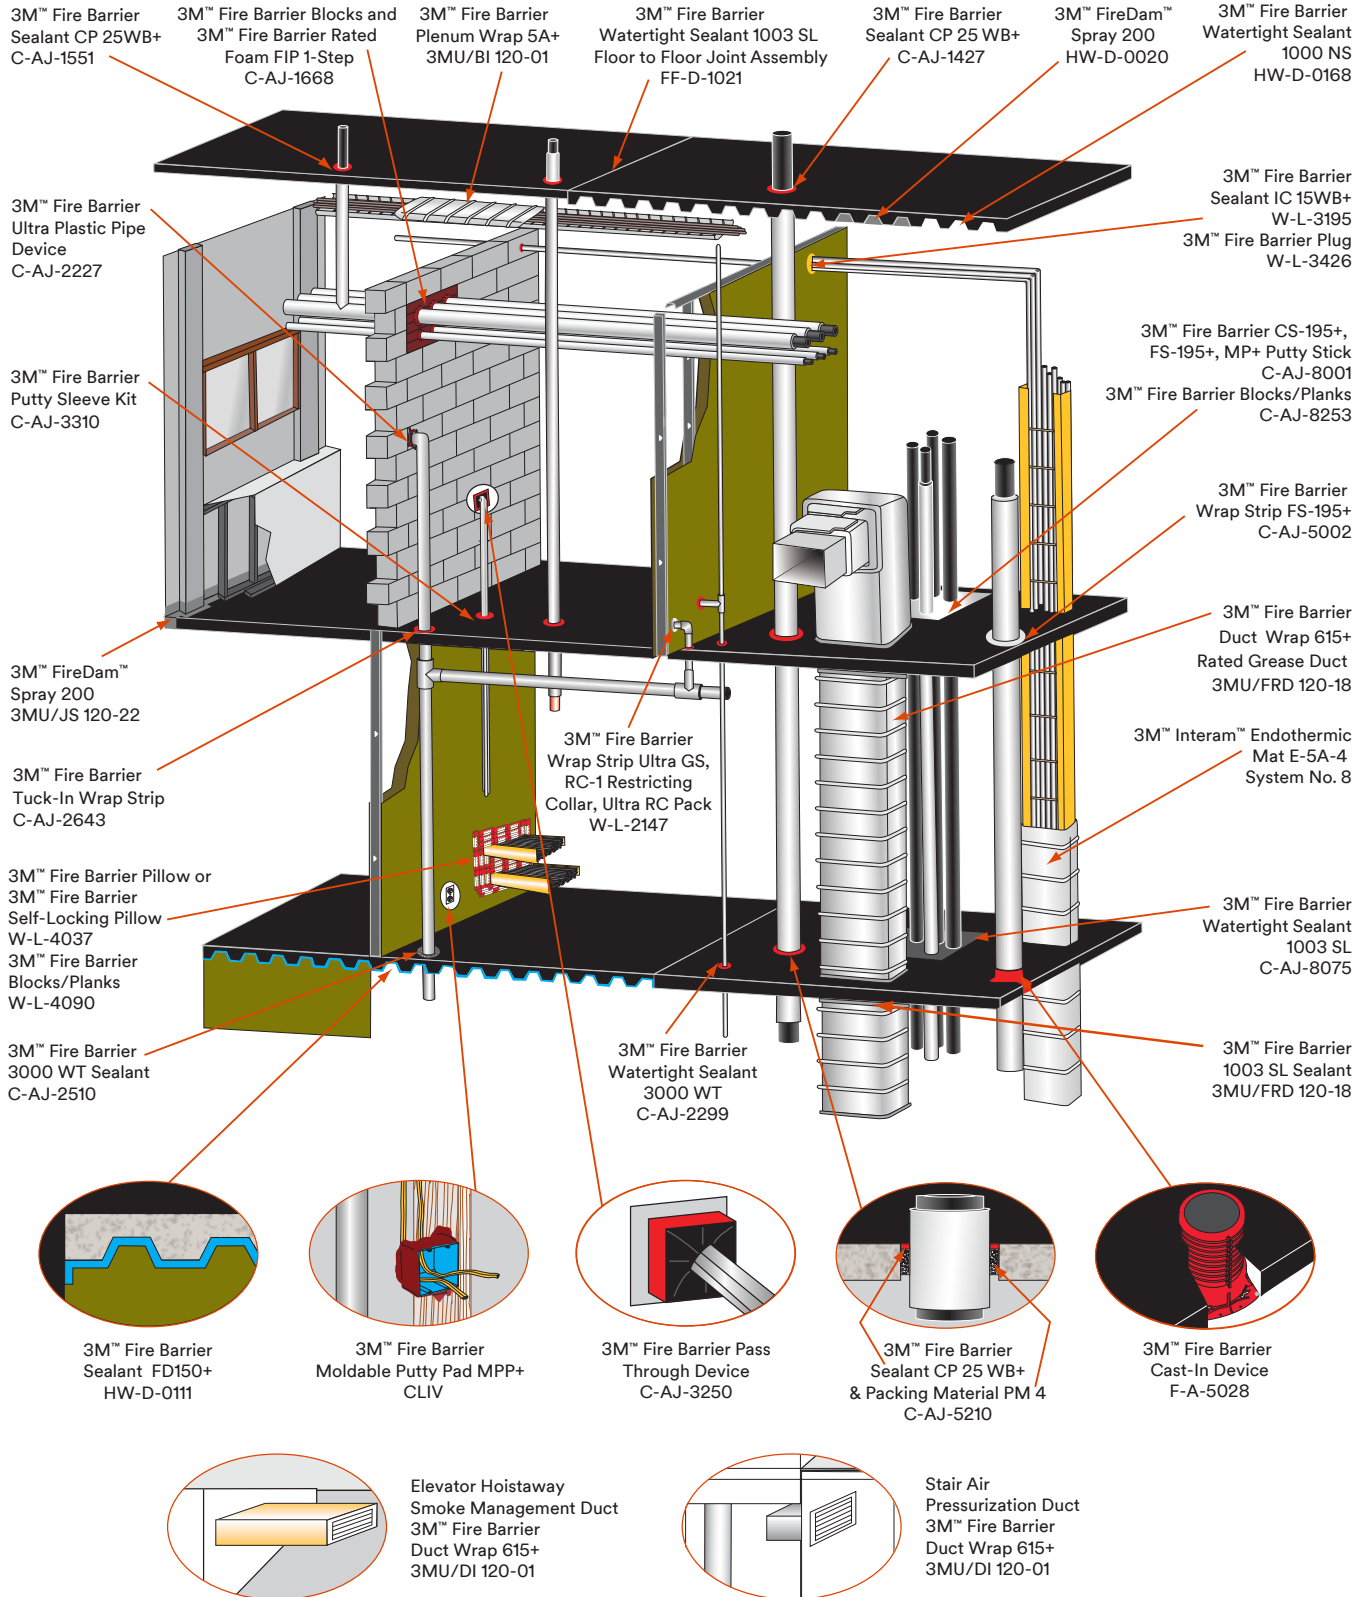

The listed systems are typical applications only. Please refer to the volume of your 3M specification guide for your specific application or use the 3M System Selector available at [3M.com/firestop](http://3M.com/firestop)

# Water Tight Silicone Firestop Sealants

## 3M™ Fire Barrier Water Tight Sealant 3000 WT

3M™ Fire Barrier Water Tight Sealant 3000 WT Intumescent Sealant forms an effective barrier to fire and water in through penetrations. This high-performance sealant helps prevent water and moisture intrusion while protecting buildings and their occupants by preventing the spread of fire, smoke and toxic gas.

- Intumescent silicone for use in systems with a firestop rating up to 4 hours when tested in accordance with ASTM E 814 (UL1479)
- Meets UL Water Leakage Test, W Rating: Class 1 requirements for systems tested in accordance with ANSI/UL 1479
- Helps prevent moisture and water migration through a building
- Minimizes noise transfer: STC-rating of 53 when tested in STC 54-rated wall assembly
- Excellent weathering properties
- Ideal for fast-track construction
- Easy application with standard caulking gun or pneumatic pump
- Excellent bonding
- Gray color with black flecks



FIRE BARRIER	SMOKE SEAL	WATER BARRIER	SOUND BARRIER
UP TO <b>4</b> HOUR Fire Protection	<b>L</b> RATED Meets Optional L Requirements	UL CLASS <b>1W</b> Rating UL Water Leakage	<b>STC 53</b> In STC 54-rated Wall Assembly

## 3M™ Fire Barrier Water Tight Sealant 1000 NS and 3M™ Fire Barrier Water Tight Sealant 1003 SL

3M™ Fire Barrier Water Tight Sealant 1000 NS (non-slump) and 3M™ Fire Barrier Water Tight Sealant 1003 SL Silicone Sealant (self-leveling) are ready to use, one-component silicone elastomers. Both cure upon exposure to atmospheric humidity to form a flexible seal. Both sealants remain elastomeric and are weather resistant. They bond to most common construction materials.

- Firestop tested up to 3 hours in accordance with ASTM E 814 (UL 1479)
- Joint System Fire Resistance tested in accordance with ASTM E 1966 (UL 2079)
- Meets UL Water Leakage Test, W Rating: Class 1 requirements
- Minimizes noise transfer: STC-rating of 56 when tested in STC 56-rated wall assembly
- ±25% dynamic joint movement capability
- Excellent adhesion
- Cures upon exposure to atmospheric humidity
- Applied with conventional caulking equipment
- Re-enterable/repairable
- Aids in the prevention of moisture and water migration through a building
- Light gray color




























FIRE BARRIER	WATER BARRIER	SMOKE SEAL	SOUND BARRIER	ELASTOMERIC
UP TO <b>3</b> HOUR Fire Protection	UL CLASS <b>1W</b> Rating UL Water Leakage	<b>L</b> RATED Meets Optional L Requirements	<b>STC 56</b> In STC 56-rated Wall Assembly	<b>±25%</b> Movement Capability

Product Information














# Ordering Information

## 3M™ Fire Barrier Sealants

Unit Volumes: 10.1 fl. oz. tube (298.7 mL, 18.2 in.<sup>3</sup>), 10.3 fl. oz. tube (304.6 mL, 18.6 in.<sup>3</sup>), 20 fl. oz. sausage (591.5 mL, 36.1 in.<sup>3</sup>), 27 fl. oz. tube (798.5 mL, 48.7 in.<sup>3</sup>), 28 fl. oz. tube (828.1 cc, 50.5 in.<sup>3</sup>), 2 gal. pail (7.57 L, 462 in.<sup>3</sup>), 4.5 gal. pail (.017 m<sup>3</sup>, 1039.5 in.<sup>3</sup>), 5 gal. pail (18.9 L, 1155 in.<sup>3</sup>)

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
<b>CP 25WB+</b> 	Up to 4-hr Penetration Firestop	10.1 oz.	Red	 Tube	000-51115-11638-4	12/Cs	Each
	Up to 4-hr Penetration Firestop	20 oz.	Red	 Sausage	000-51115-11642-1	10/Cs	Each
	Up to 4-hr Penetration Firestop	27 oz.	Red	 Cartridge	000-51115-11641-4	6/Cs	Each
	Up to 4-hr Penetration Firestop	2 gal.	Red	 Pail	000-51115-11639-1	1/Cs	Each
	Up to 4-hr Penetration Firestop	5 gal.	Red	 Pail	000-51115-11640-7	1/Cs	Each
<b>IC 15WB+</b> 	Up to 3-hr Penetration Firestop	10.1 oz.	Yellow	 Tube	000-51115-16557-3	12/Cs	Each
	Up to 3-hr Penetration Firestop	20 oz.	Yellow	 Sausage	000-51115-16560-3	10/Cs	Each
	Up to 3-hr Penetration Firestop	4.5 gal.	Yellow	 Pail	000-51115-16558-0	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Blue	 Tube	000-51115-11574-5	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Blue	 Sausage	000-51115-11634-6	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Blue	 Cartridge	000-51115-11602-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Blue	 Pail	500-51115-11575-7	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Red	 Tube	000-51115-18812-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Red	 Sausage	000-51115-18810-7	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Red	 Cartridge	000-51115-18811-4	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Red	 Pail	000-51115-18813-8	1/Cs	Each
<b>FD 150+</b> 	Up to 3-hr Penetration/4-hr Joint Firestop	10.1 oz.	Grey	 Tube	000-51115-16564-1	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	20 oz.	Grey	 Sausage	000-51115-16567-2	12/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	28 oz.	Grey	 Cartridge	000-51115-16566-5	6/Cs	Each
	Up to 3-hr Penetration/4-hr Joint Firestop	4.5 gal.	Grey	 Pail	000-51115-16565-8	1/Cs	Each

## 3M™ Fire Barrier Water Tight Sealants (W-Rated)

Product Number	Description	Size	Color	Unit	Billing UPC Number	Qty.	Price Unit
<b>Watertight Spray</b> 	Up to 3-hr Joint Firestop	5.0 gal.	Red	 Pail	000-76308-98232-4	1/Cs	Each
	Up to 3-hr Joint Firestop	5.0 gal.	White	 Pail	000-76308-86113-1	1/Cs	Each
<b>3000 WT</b> 	Intumescent Silicone (Up to 4-hr Penetration Firestop)	10.1 oz.	Grey	 Tube	000-51115-16593-1	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	20 oz.	Grey	 Sausage	000-51115-18788-9	12/Cs	Each
	Intumescent Silicone (Up to 4-hr Penetration Firestop)	4.5 gal.	Grey	 Pail	500-51115-16594-3	1/Cs	Each
<b>1000 NS</b> 	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	10.1 oz.	White	 Tube	000-51115-11535-6	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	20 oz.	White	 Sausage	000-51115-18790-2	12/Cs	Each
	Non-slump Silicone (Up to 3-hr Penetration/Joint Firestop)	4.5 gal.	White	 Pail	500-51115-11537-5	1/Cs	Each
<b>1003 SL</b> 	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	10.1 oz.	White	 Tube	000-51115-11538-7	12/Cs	Each
	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	20 oz.	White	 Sausage	000-51115-18789-6	12/Cs	Each
	Self-Leveling Silicone (Up to 3-hr Penetration/Joint Firestop)	4.5 gal.	White	 Pail	500-51115-11540-5	1/Cs	Each

Product Information