




NXT[®] LEVEL DL

A versatile, polishable monolithic wear surface overlay

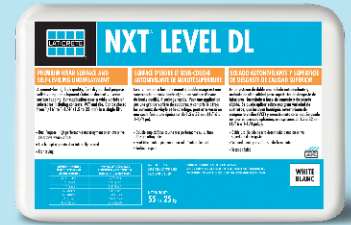

Refer to Data Sheet 87.5

NXT[®] LEVEL DL (Decorative Leveler) is a polishable cement-based high quality, fast drying, dual purpose, self-leveling, interior wear surface overlay that can be accented with a wide variety of coloring systems & finishes. Designed for use as a durable and attractive interior wear surface topping or a high performance self-leveling underlayment (SLU).



FEATURES	BENEFITS
Wear surface overlay	Provides a flat and monolithic look [^]
Versatile	Rapid Return to Service SLU, flooring can be placed at 6 hours
High Strength	5100 PSI (35.1 Pa) for long lasting floors
Flowable and pumpable	Easy mixing and placing qualities
Available in standard grey or white	Large array of color options
May broadcast custom aggregate into wet material	Customize polished look with different aggregates
Can be topically or integrally dyed to match specific design needs	Compatible with interior design themes
Can be integrally pigmented with PERMACOLOR [®] Select [†] color kits	40 stock colors available and custom blends
Fast drying	Walkable in 1-2 hours

Pour Depth

- 1/16" to 1-1/4" (1.5 to 31.2 mm)
- Minimum 1/2" (12 mm) to polish

Uses

- Commercial, retail (malls & shops)
- Healthcare
- Education (schools & universities)
- Residential
- Hotels

Packaging

- 55 lb (25 kg) bag, 56 bags per pallet

Item #:

- Grey / 0907-0055-21
- White / 0908-0055-22

[^] Concrete is the only suitable substrate when using NXT[®] LEVEL DL as a wear surface. [†] United States Invention Patent No.: 6,784,229 (and other Patents).

^{*} NXT LEVEL DL can be polished after 24 hours. Minimum 1/2" (13 mm) thickness required for polishing applications. Refer to DS 238 Guide for Polishing NXT Self-Leveling Overlayments for more detailed information about polishing.