

Flex-Flash UN




A SIKA COMPANY

GENERAL DESCRIPTION

Flex-Flash UN is a thermoset material made of uncured neoprene rubber.

BASIC USE

Flex-Flash UN (uncured neoprene) is typically used as the heavy-duty reinforcing and exposed flashing membrane in conjunction with Hydrotech’s Monolithic Membrane 6125® roofing and waterproofing membrane. Flex-Flash UN’s thermoset properties provide ease in forming around penetrations and corners as well as detailing expansion joints and drains. Flex-Flash UN can also be used embedded into the MM6125 installed over the entire substrate to form the Dual Membrane Assembly.

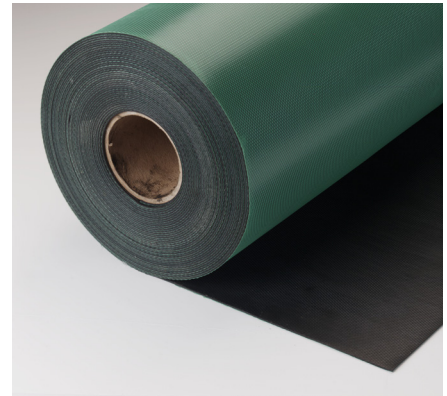

SIZES

The Flex-Flash UN membrane is available in a standard thickness of 60 mils (0.060 inch), standard widths of 6, 12, 18, 24, 36 and 48 inches, and a length of 100 feet.

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
WIDTH (inches)	ASTM D751-66	0 / +.125
LENGTH (inches)	ASTM D751-66	0 / +1.0
THICKNESS (inches)	ASTM D751-66	0.060 + 10%
TENSILE STRENGTH (psi, min.)	ASTM D412, DIE C	1400
ELONGATION (% , min.)	ASTM D412, DIE C	300
TEAR RESISTANCE (lbs/inch, min.)	ASTM D624, DIE C	125
BRITTLENESS POINT @ -30° F	ASTM D2137	NO BREAK
OZONE RESISTANCE (@ 20% Ext., 100MPa, 100 hrs. @ 104° F)	ASTM D1149	NO CRACKS @ 7X MAGNIF.
WATER ABSORPTION (% , weight change range) (46 hrs. @ 158° F)	ASTM D471	-8, +2

LEED INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	0	
Manufacture Location		Passaic, NJ
Extraction/Harvesting Location		82% Akron, OH 18% Japan
VOC Content (g/L)		0

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user’s consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.