

APPLICATION

TRUFAST® SIP Fasteners are specifically engineered for attaching structural insulated panels (SIPs) and nailable insulation panels to wood and steel substrates. Featuring a large, pancake head style with a 6-lobe drive, TRUFAST SIP Fasteners drive quickly and smoothly, and draw panels securely without the need of a washer. Only TRUFAST offers three fastener styles for use in wood, corrugated steel and steel members without pre-drilling! Contact your panel manufacturer or distributor to ask for a test drive of a TRUFAST SIP Fastener and see why they're the #1 fastener in the SIP industry.

PRODUCT FEATURES

- Case-hardened and tempered for easy installation and long-term durability
- Large diameter, low profile pancake head provides excellent pull-through resistance without the need for a washer while eliminating “telegraphing” on shingles, metal panels, and other roof surface materials
- 6-lobe internal drive offers excellent bit engagement during installation, especially in high torque applications
- Widest selection of fastener lengths in the industry for proper sizing to panel thickness
- Choice of 3 thread/point styles for job-matched performance in wood, steel, or concrete/CMU substrates

CODE APPROVALS & LISTINGS

FM Global



Miami-Dade County



State of Florida-FL#: 4500

DrJ Certification
Technical Evaluation Reports
TER No. 1909-04
TER No. 2101-01



CE 2809
European Technical Assessment
ETA 19/0616
DOP No. DoPTru02-2022-01-03



MATERIAL SPECIFICATIONS

Material: Case-hardened & tempered carbon steel

Coating: TRU-KOTE™ Epoxy E-coat (black)

LEED® Eligible Recycled Content: 20%



SIPTP
Thread Point for Wood, Timber,
and Concrete/CMU Applications





SIPLD
Light-Duty Drill Point for
Corrugated Steel Deck, Wood,
& Concrete/CMU Applications




SIPHD
Heavy-Duty Drill Point for Thick
Steel Member Applications



PRODUCT SPECIFICATIONS

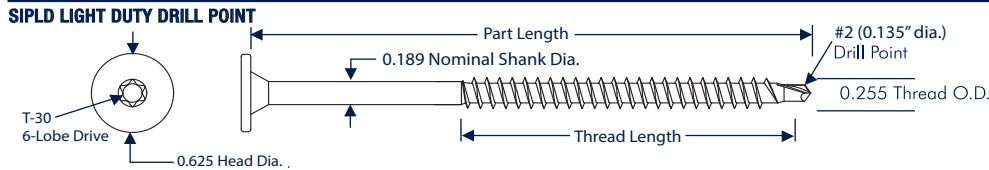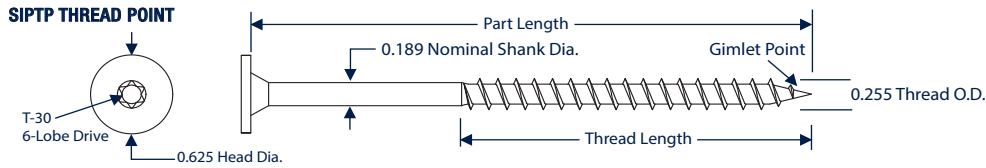

NOTE: For thread lengths 2.25", 3.25", and 4.25", drill point is 0.125"

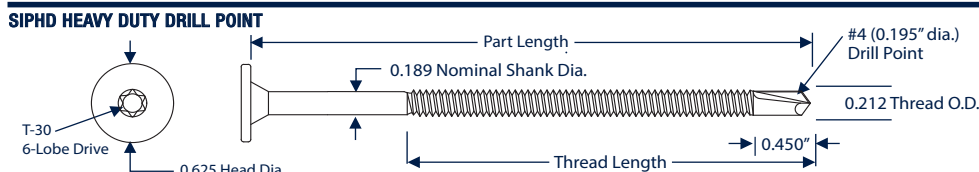

NOTE: For thread lengths 2.25", 3.25", and 4.25", drill point is 0.125"

PRODUCT SELECTION – THREAD POINT (SIPTP)

Length	Thread Length	SIP TP Part #	Pkg. Qty.
2" (51 mm)	1.75"	SIPTP-2000	500/Pail
2-1/2" (64 mm)	1.75"	SIPTP-2500	500/Pail
3" (76 mm)	2.0"	SIPTP-3000	500/Pail
3-1/2" (89 mm)	2.0"	SIPTP-3500	500/Pail
4" (102 mm)	2.75"	SIPTP-4000	500/Pail
4-1/2" (114 mm)	2.75"	SIPTP-4500	500/Pail
5" (140 mm)	2.75"	SIPTP-5000	500/Pail
5-1/2" (140 mm)	2.75"	SIPTP-5500	500/Pail
6" (152 mm)	2.75"	SIPTP-6000	500/Pail
6-1/2" (165 mm)	2.75"	SIPTP-6500	500/Pail
7" (191 mm)	2.75"	SIPTP-7000	500/Pail
7-1/2" (191 mm)	2.75"	SIPTP-7500	500/Pail
8" (216 mm)	2.75"	SIPTP-8000	500/Pail
8-1/2" (216 mm)	2.75"	SIPTP-8500	250/Pail
9" (229 mm)	2.75"	SIPTP-9000	250/Pail
10" (254 mm)	2.75"	SIPTP-10000	250/Pail
11" (279 mm)	2.75"	SIPTP-11000	250/Pail
12" (305 mm)	2.75"	SIPTP-12000	250/Pail
13" (330 mm)	2.75"	SIPTP-13000	250/Box
14" (356 mm)	2.75"	SIPTP-14000	250/Box
15" (381 mm)	2.75"	SIPTP-15000	250/Box
16" (406 mm)	2.75"	SIPTP-16000	250/Box
18" (483 mm)	2.75"	SIPTP-18000	250/Box