



## Sikacrete<sup>®</sup> 211 SCC Plus

One-component, cementitious, polymer-modified, self consolidating concrete mix with an integral migrating corrosion inhibitor



## Sikacrete® 211 SCC Plus

Powered by  
**Sika ViscoCrete®**  
**Technology**

### APPLICATIONS

- ▲ Full depth repairs
- ▲ On grade, above and below grade on concrete
- ▲ Vertical and overhead surfaces when formed and pumped or poured
- ▲ As a structural repair material for parking facilities, industrial plants, walkways, bridges, tunnels, dams, and balconies
- ▲ Filler for voids and cavities

### ADVANTAGES

- ▲ Self-consolidating concrete - excellent placement characteristics
- ▲ Polymer-modified
- ▲ Integral penetrating corrosion inhibitor
- ▲ Silica fume enhanced
- ▲ Can be pumped or poured into forms and gets excellent consolidation without vibrating.

### TYPICAL DATA

- ▲ **Initial Spread**  
SCC, 27-33 in. approx.
- ▲ **Spread @ 30 min.**  
> 15 in.
- ▲ **Application Time**  
60 minutes
- ▲ **Flexural Strength (ASTM C-78)**

1 day	500 psi (3.4 MPa)
7 days	750 psi (5.2 MPa)
28 days	1,000 psi (6.9 MPa)
- ▲ **Splitting Tensile Strength (ASTM C-496)**

7 days	750 psi (5.1 MPa)
28 days	1,000 psi (6.9 MPa)
- ▲ **Slant Shear Bond Strength\* (ASTM C-882 modified)**

1 day	1,000 psi (6.9 MPa)
7 days	1,500 psi (10.3 MPa)
28 days	2,500 psi (17.2 MPa)
- ▲ **Direct Tensile Bond (ACI 503)**

1 day	250 psi (1.7 MPa)
7 days	300 psi (2.1 MPa)
- ▲ **Compressive Strength (ASTM C-39)**

1 day	2,000 psi (13.8 MPa)
7 days	6,000 psi (41.4 MPa)
28 days	7,000 psi (48.3 MPa)
- ▲ **Shrinkage (ASTM C-157)**


28 days	<0.05%
---------	--------
- ▲ **Chloride Ion Permeability (ASTM C-1202)**

28 days	<650 Coloumbs
---------	---------------
- ▲ **Freeze Thaw Resistance (ASTM C-666)**

300 cycles	>99%
------------	------
- ▲ **Length change after 6 months**

	0.006
--	-------

\*Mortar scrubbed into substrate.

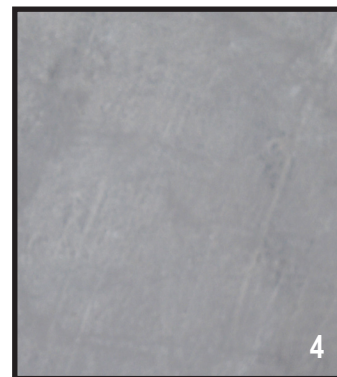

1. Form the underside of a parking deck.
2. Mix the Sikacrete 211 SCC to the appropriate consistency.
3. Pour the mixed material in the forms. Once filled, depending on the size of the pour, vibration may be required.
4. Finish as desired. Strip the forms after necessary strength gain.

Contact Sika at:  
 Phone: 1-800-933-SIKA (Nationwide)  
 Website: [www.sikaconstruction.com](http://www.sikaconstruction.com)



**Sika Corporation**  
 201 Polito Avenue  
 Lyndhurst, NJ 07071  
 Phone: 201-933-8800  
 Fax: 201-933-6225

**Sika Canada Inc.**  
 601 Delmar Avenue  
 Pointe Claire  
 Quebec H9R 4A9  
 Phone: 514-697-2610  
 Fax: 514-694-2792

**Sika Mexicana S.A. de C.V.**  
 Carretera Libre Celaya Km. 8.5  
 Fracc. Industrial Balvanera  
 Corregidora, Queretaro  
 C.P. 76920  
 Phone: 52 442 2385800  
 Fax: 52 442 2250537