



FIRESTOP DEVICES

Metacaulk® Firestop Collars

Prefabricated system



Code	Description	Qty.
66352	1-½" Pipe Collar	12
66353	2" Pipe Collar	12
66350	3" Pipe Collar	6
66351	4" Pipe Collar	6
66354	6" Pipe Collar	2




FEATURES

- No measurements of material
- Fits in limited access areas
- 25% reduction of installation times
- Tested in accordance with ASTM E814 (UL 1479)
- VOC compliant - CDPH Standard Method v1.2
- Complies to UL required Accelerated Aging and High Humidity Testing
- Testing to ASTM G21 standard

APPLICATION • UL classified for both open and closed systems • Simple locking mechanism for easy installation

RECOMMENDED FOR • PVC • CPVC • ABS • PVC foam core • ABS foam core • FRPP • PEX pipe & tubing • PVDF • PP (Aquatherm) • Insulated pipes (FG & AB/PVC) • Electrical cable

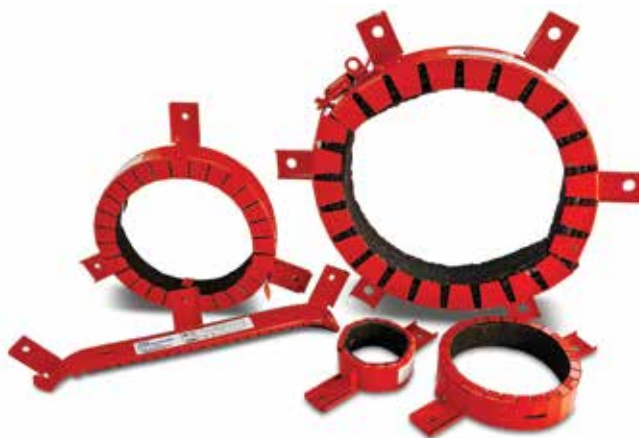

Metacaulk® Intumescent Sleeve

Firestop device

Code	Description	Qty.
66584	For 2", 3" & 4" Pipe	6
66582	For 6" & 8" Pipe	1




FEATURES

- No steel bolts or fasteners
- Can be retrofitted
- Flexible
- Tested in accordance with ASTM E814 (UL 1479)
- VOC compliant - CDPH Standard Method v1.2
- Complies to UL required Accelerated Aging and High Humidity Testing

APPLICATION • Firestop through penetrations with a single sleeve • Ideal for combustible pipes penetrating a concrete fluted deck assembly

RECOMMENDED FOR • PVC • cc-PVC • CPVC • FRPP • PP • ABS • PVDF • PEX • Rigid non-metallic conduit installations • Transitions from PVC to metallic

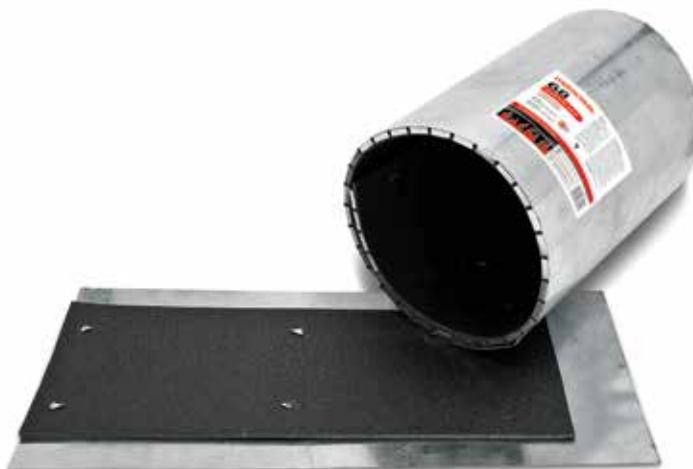

*FBC™ System Compatible indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology. The FBC System Compatible Logo, FBC™, FlowGuard Gold®, BlazeMaster®, Corzan® and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates.