

PRODUCT SUBMITTAL

Submitted to:

Project:

Date of Submittal:

Submitted by, Contact name:

Company:

Address:

Phone:

Email:

Approved

Approved as Noted

Not Approved

Comments:

By:

Date:

Product Family: PMF - Self-Piercing Modified Truss Head Fine Thread

TABLE A

Item Number	Screw Size (#)	Length (in.)	Head Style	Head Diameter (in.)	TPI	Point Style	Coating	Maximum Drilling Capacity (in.)	Drive Type	Bulk Quantity	Application	Special Features
31V	7	9/16-in	MTH	0.447	20	Vector	Phosphate	0.033	#2 Phillips	10,000	Lath or metal to metal up to 0.033.in.	with Serrations Under Head
31ZV	7	9/16-in	MTH	0.447	20	Vector	Clear Zinc	0.033	#2 Phillips	10,000	Lath or metal to metal up to 0.033.in.	with Serrations Under Head
31	8	9/16-in	MTH	0.447	15	Streaker	Phosphate	0.033	#2 Phillips	10,000	Lath or metal to metal up to 0.033.in.	
31RG	8	9/16-in	MTH	0.447	15	Streaker	GrabberGard®	0.033	#2 Phillips	10,000	Lath or metal to metal up to 0.033.in.	
31Z	8	9/16-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	10,000	Lath or metal to metal up to 0.033.in.	
3119Z	8	3/4-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	8,000	Lath or metal to metal up to 0.033.in.	
32	8	1-in	MTH	0.447	15	Streaker	Phosphate	0.033	#2 Phillips	5,000	Lath or metal to metal up to 0.033.in. or wood	
32RG	8	1-in	MTH	0.447	15	Streaker	GrabberGard®	0.033	#2 Phillips	5,000	Lath or metal to metal up to 0.033.in. or wood	
32Z	8	1-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	5,000	Lath or metal to metal up to 0.033.in. or wood	
33RG	8	1-1/4-in	MTH	0.447	15	Streaker	GrabberGard®	0.033	#2 Phillips	5,000	Lath or metal to metal up to 0.033.in. or wood	
33Z	8	1-1/4-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	5,000	Lath or metal to metal up to 0.033.in. or wood	
3138	8	1-1/2-in	MTH	0.447	15	Streaker	Phosphate	0.033	#2 Phillips	3,000	Lath or metal to metal up to 0.033.in. or wood	
3138RG	8	1-1/2-in	MTH	0.447	15	Streaker	GrabberGard®	0.033	#2 Phillips	3,000	Lath or metal to metal up to 0.033.in. or wood	
3138Z	8	1-1/2-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	3,000	Lath or metal to metal up to 0.033.in. or wood	
3140Z	8	1-5/8-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	3,000	Lath or metal to metal up to 0.033.in. or wood	
3145Z	8	1-3/4-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	3,000	Lath or metal to metal up to 0.033.in. or wood	
3151Z	8	2-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	2,500	Lath or metal to metal up to 0.033.in. or wood	
3163Z	8	2-1/2-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	2,500	Lath or metal to metal up to 0.033.in. or wood	
3176Z	8	3-in	MTH	0.447	15	Streaker	Clear Zinc	0.033	#2 Phillips	1,000	Lath or metal to metal up to 0.033.in. or wood	
311038Z	10	1-1/2-in	MTH	0.447	12	Streaker	Clear Zinc	0.033	#2 Phillips	4,000	Lath or metal to metal up to 0.033.in. or wood	
311089Z	10	3-1/2-in	MTH	0.447	12	Streaker	Clear Zinc	0.033	#2 Phillips	1,000	Lath or metal to metal up to 0.033.in. or wood	
311010ZZ	10	4-in	MTH	0.447	12	Streaker	Clear Zinc	0.033	#2 Phillips	1,000	Lath or metal to metal up to 0.033.in. or wood	

Grabber screws manufactured in America are available as SPECIAL-ORDER INVENTORY. CONTACT GRABBER FOR CURRENT PRICE AND AVAILABILITY. For identification purposes, an "A" will added to the end of the item number and "Made in America" will be printed on the label.

Prefixes: C = Collated, X = 1-lb, VB = 5-lb, BP = Blister Pack

Description: Modified Truss Head Streaker point screw used in light-gauge (see TABLE A - Maximum Total Drilling Thickness) steel and wood applications. Vector point screws are designed for faster penetration into light-gauge steel.

Directions: Use a standard screwgun with a depth sensitive nose piece. Suggested screwgun specification for optimal performance - Gauges #6 - #10, up to 4,000 RPM. The Modified Truss Head is fully seated when the bearing surface of the head is flush with the work surface. Overdriving may result in failure of the fastener.

Corrosion: For Corrosion Resistance Testing Results, see TABLE B.

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001. PMF fasteners comply with ASTM C1513 and ASTM C1002 requirements.

PMF - Self-Piercing Modified Truss Head Fine Thread

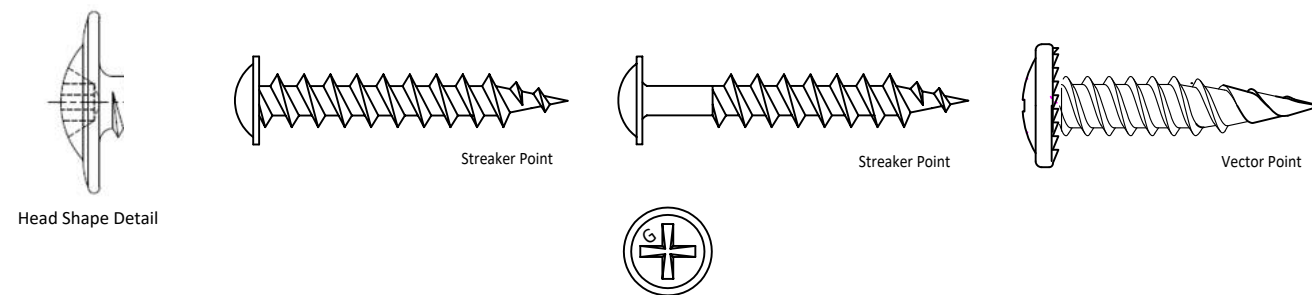


TABLE B

CORROSION RESISTANCE TESTING RESULTS			
Finish	Test	Standard/Protocol	Results (minimum)
Phosphate	Salt Spray	ASTM B117	24 hours, no red rust
(Z) Clear Zinc	Salt Spray	ASTM B117	12 hours, no red rust
(RG) GrabberGard	Salt Spray	ASTM B117	1000 hours, no red rust

NOTE: Salt Spray Testing (SST) results are not intended to predict corrosion resistance in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool to compare different metals and different metal coatings in a tightly controlled highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the *Grabber Guide to Corrosion Resistance for Fasteners*.

Grabber's approved mills keep tight control over all production standards and processes. Grabber's mills are ISO 9001 ensuring Grabber fasteners meet or exceed the highest industry standards.

TRADEMARKS:

The following trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER®
GrabberGard®
Vector®

NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.