

Protecto Seal 45™

Building Tapes & Flashing Solutions - Page 8

Protecto Flex®

Building Tapes & Flashing Solutions - Page 6

**Protecto Roof Edge Seal/Protecto Extreme
Roof Deck Seam Tape™/Protecto Roof
Deck Seam Tape™/Tile Flash**

Roofing Solutions - Pages 10-11

Protecto Deck Joist Tape™


Building Tapes & Flashing Solutions - Page 7

**Jiffy Seal® 140/60 &
Protecto Universal Primer-Free Membrane**

Below Grade & Building Envelope - Page 13

Protecto Form Flash 1

Building Tapes & Flashing Solutions - Page 7

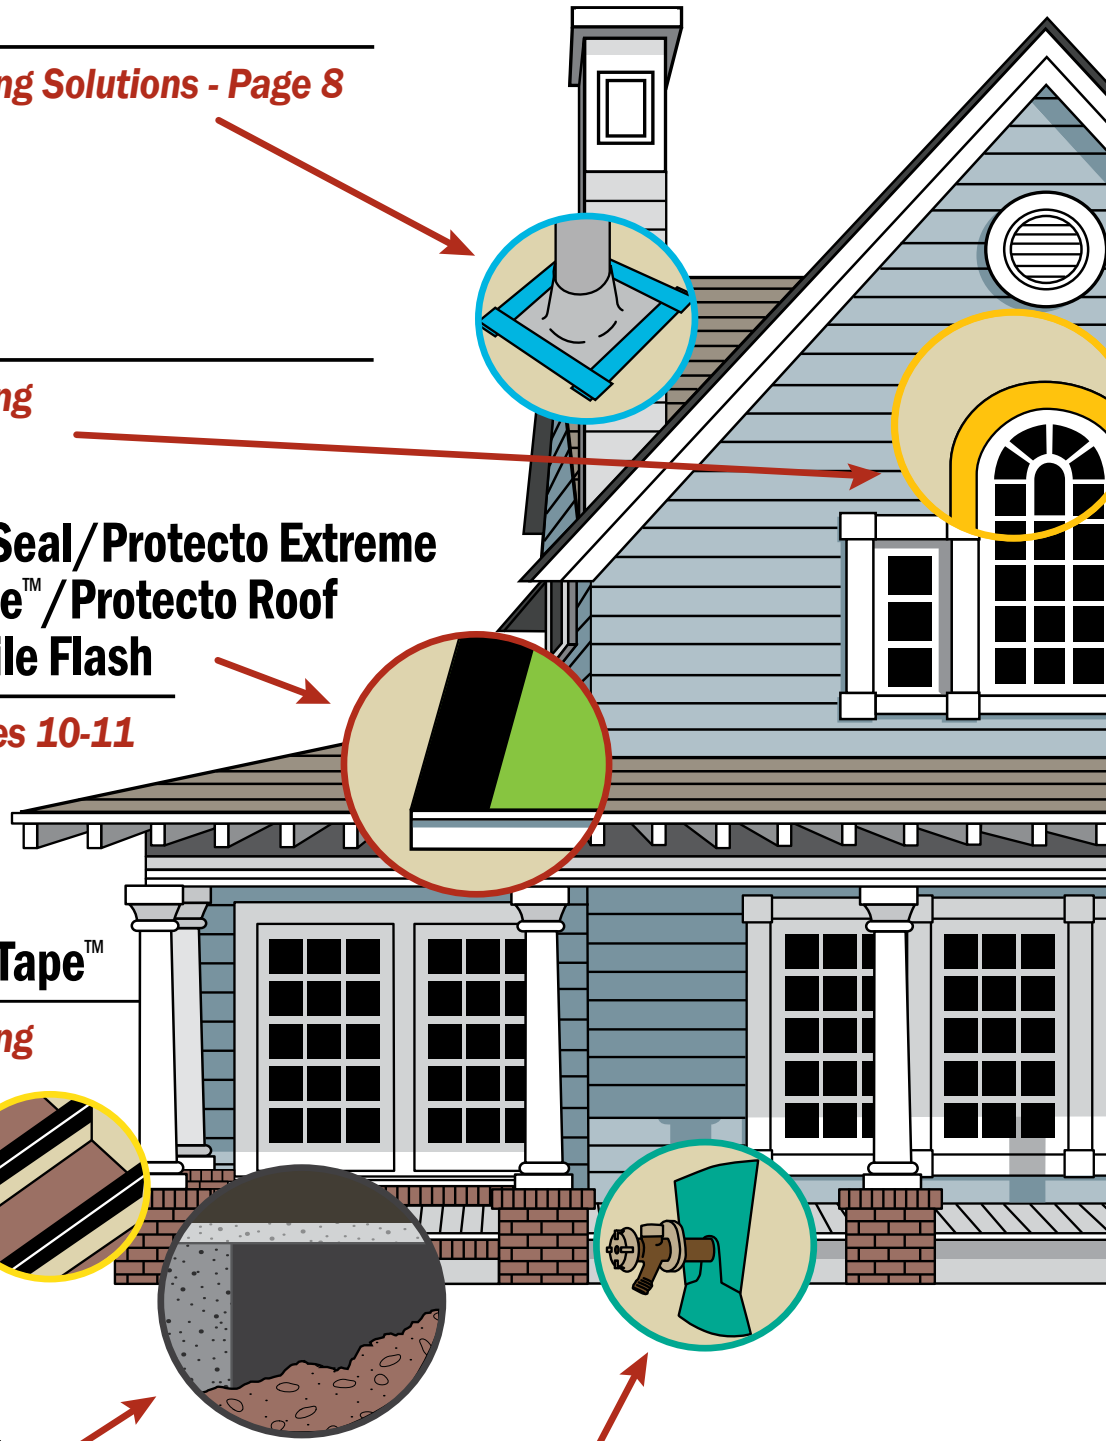



PROTECTO PRIMER-FREE STUCCO TAPE

A high performance tape designed for use with stucco and EIFS systems to seal around penetrations and at sheathing joints and window/door flanges. The polyester, antimicrobial coated fabric top layer provides an excellent bonding surface for cementitious and synthetic stucco coatings.

- No primer needed – utilizes Protecto Wrap's Primerless Super Stick Technology™ with split release liner
- Sticks down to -20°F (-28°C)
- Compatible with and will adhere to most construction surfaces, wood, concrete, CMU block, OSB, plywood, glass mat exterior sheathing products, foam insulation board, ICF and metal
- Does not support mold growth
- Roll sizes available: 4", 6", 9", 12" x 75' • High temperature: 300°F



PROTECTO UNIVERSAL PRIMER-FREE THRU-WALL FLASHING

This high performance thru-wall flashing membrane is designed to be applied down to -20°F (-28°C) without the use of primer or mechanical fasteners.

- No primer needed – utilizes Protecto Wrap's Primerless Super Stick Technology™ with split release liner
- Sticks down to -20°F (-28°C) and adheres to damp CMU surfaces
- Compatible with and will adhere to most construction surfaces, wood, concrete, CMU block, OSB, plywood, glass mat exterior sheathing products, foam insulation board, ICF and metal
- Easy to apply peel and stick cold applied membrane with 6 month exposure rating
- No VOC's, HFCC's or CFC's
- Roll sizes available: 4", 6", 9", 12", 18", 24", 36" x 50' • High temperature: 300°F



PROTECTO SILL PAN FLASH™ SELF FORMING CORNER

A cold applied self-adhering membrane composed of a tough cross laminated high density polyethylene surface coated on one side with a layer of our proprietary asphalt adhesive.

- Rubberized asphalt adhesive
- Custom designed one piece sill flashing tape that conforms to the rough sill to create a continuous sill pan
- Completely seals sill corners to prevent water damage
- Easily conforms to the sill corners to provide a clean 90 degree corner without excessive buildup
- Roll sizes available: 6", 9" x 50' • High temperature: 240°F



PROTECTO SILL PAN FLASH™ BUTYL SELF FORMING CORNER

A cold applied self-adhering membrane composed of a tough cross laminated high density polyethylene surface coated on one side with a layer of 100% butyl adhesive.

- 100% butyl adhesive
- Compatible with all known window manufacturer's installation instructions
- Custom designed one piece sill flashing tape that conforms to the rough sill to create a continuous sill pan
- Completely seals sill corners to prevent water damage
- Roll sizes available: 6", 9" x 50' • High temperature: 300°F



PROTECTO FLEX® WINDOW & DOOR SEALING TAPE

Forms a permanent waterproofing air/vapor seal around curved and radius doors and windows that prevents air and moisture leaks. The flexible cross-laminated top surface will expand and conform to irregular or curved surfaces while the aggressive adhesive forms a permanent bond between the window fin and the building substrate.

- A 40-mil thick peel and stick flashing tape
- Expands and conforms to radius or curved window fins
- Self seals around nails, screws and staples
- Roll sizes available: 6", 8", 9" x 50' • High temperature: 240°F