

APPLICATIONS:

	Plywood	Under Tile	Pedestrian Deck	Vehicular Deck	Athletic Surface	Roof Terrace	Mechanical Room	Balcony
PRIMERS								
Vulkem® Primer #171 ‡	•	•	•	•	•	•	•	•
Vulkem® 191 Primer	•	•	•	•	•	•	•	•
Tremco Epoxy Primer	•	•	•	•	•	•	•	•
TREMprime® Multi-Surface Urethane Primer	•		•				•	•
TREMprime® VB	•	•	•	•	•	•	•	•
BASE COATS								
Vulkem® 350	•	•	•	•	•	•	•	•
Vulkem® 350FC	•	•	•	•	•	•	•	•
Vulkem® 350NF	•	•	•	•	•	•	•	•
Vulkem® 360NF	•		•	•	•	•	•	•
INTERMEDIATE COATS								
Vulkem® 346				•				
Vulkem® 351								
Vulkem® 351NF	•							
Vulkem® 950NF				•		•		
Vulkem® Epoxy WC				•				
TOP COATS								
Vulkem® 346				•				
Vulkem® 351			•		•	•	•	•
Vulkem® 351NF	•		•		•	•	•	•
Vulkem® 950NF			•	•			•	
Vulkem® 951NF	•		•	•	•	•	•	•
SPECIALTY								
Vulkem® OC810	•		•			•	•	•

Reference the current product data sheets on our website at www.tremcosealants.com for more specific product information.
 For specific tie-in recommendations and Instructions, please contact your local Tremco Sales or Technical Service Representative.
 ‡Not for use in Canada

PROPERTIES:

	Low VOC	Components	UV Stable (Aliphatic)	Recommended Substrates:
PRIMERS				
Vulkem® Primer #171 ‡		1		Concrete, plywood, other porous substrates**
Vulkem® 191 Primer	•	1		Concrete, plywood, other porous substrates**, interlaminary, urethane coatings, TREMproof membranes
Tremco Epoxy Primer	•	2		Concrete, plywood, other porous substrates**, interlaminary, urethane coatings, TREMproof membranes
TREMprime® Multi-Surface Urethane Primer	•	2		Concrete, plywood, other porous substrates**, interlaminary, urethane coatings
TREMprime® VB	•	2		Concrete, plywood, other porous substrates**, interlaminary, urethane coatings, TREMproof membranes
BASE COATS				
Vulkem® 350		1		Concrete, metal
Vulkem® 350FC	•	2		Concrete, metal
Vulkem® 350NF	•	1		Concrete, metal
Vulkem® 360NF	•	2		Concrete, metal
INTERMEDIATE COATS				
Vulkem® 346		1	•	Vulkem 346
Vulkem® 351		1	•	Vulkem 350, 350NF, 360NF
Vulkem® 351NF		2	•	Vulkem 350NF
Vulkem® 950NF	•	2		Vulkem 350NF, 350FC
Vulkem® Epoxy WC	•	2		Vulkem 350, 350NF, 360NF
TOP COATS				
Vulkem® 346		1	•	Vulkem 346
Vulkem® 351		1	•	Vulkem 350, 350NF, 360NF
Vulkem® 351NF	•	2	•	Vulkem 350NF
Vulkem® 950NF	•	2		Vulkem 350NF, 350FC
Vulkem® 951NF	•	2	•	Vulkem 950NF
SPECIALTY				
Vulkem® OC810	•	1	•	Concrete, wood (with Tremco-approved primer)

Reference the current product data sheets on our website at www.tremcosealants.com for more specific product information.

For specific tie-in recommendations and Instructions, please contact your local Tremco Sales or Technical Service Representative.

*Prior approval required by Tremco Technical Services; approval is based on compatibility and adhesion testing.


‡Not for use in Canada

SPECIALTY SYSTEMS

Waterproof coatings for a variety of specialty applications, including one-coat and rapid-cure solutions, as well as systems for under-tile applications, mechanical rooms and areas subject to heavy abrasion.

BALCONY, LIGHT PEDESTRIAN & MECHANICAL ROOM


One-coat systems for areas that will receive light foot traffic such as balconies and mechanical rooms / work areas.

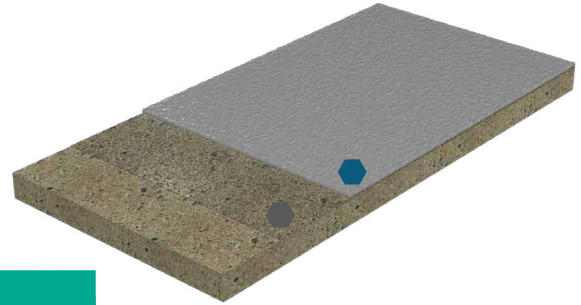

	Product Options	Coverage Rate	Wet Mils
Base Coats	Vulkem Primer #171	100 to 600 ft ² /gal	
	Vulkem 191 Primer	400 to 450 ft ² /gal	
	TREMprime Multi-Surface Urethane Primer	200 to 300 ft ² /gal	
Top	Vulkem OC810	64 ft ² /gal	25

UNDER-TILE APPLICATIONS

Recommended two-coat system for tiles, pavers and bonded overburden.

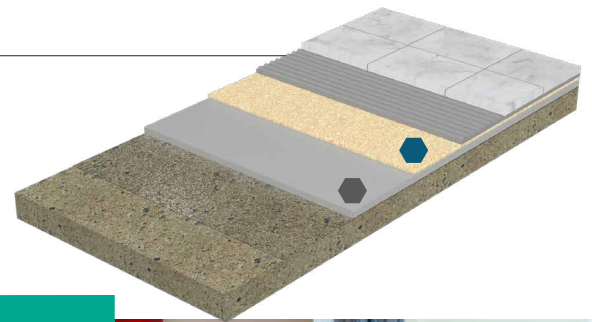

	Product Options	Coverage Rate	Wet Mils
Base	Vulkem 350NF	25 to 40 ft ² /gal	40 to 60
Top	Tremco Epoxy Primer	133 to 160 ft ² /gal	10 to 12

